

## Two Drawer Counter Prep Station Variable Temperature Unit + Solid Worktop



**Refrigerant**  
Energy Saving  
Hydrocarbon R290

**VCR2/CW**  
Standard Casters (C)  
Solid Worktop (W)

**Storage Capacity / Drawer**

**Hotel Pans (HP)**  
4 standard size HP  
20" x 12" x 4" Deep  
or the equivalent

**Maximum Weight**  
88 lb (40 kg)

**Storage Volume**  
3 cu ft (86 litres)

**Warranty**

**Two Year Parts & Labor** (including the **Gaskets**) and a **5 Year Warranty** on **Compressors**

Full Warranty Terms available on request

**Applications**

- Bulk storage at the point of use, in the heart of the kitchen
- Ideal for meat, deli and larder prep
- Suitable for pastry and dessert prep
- Perfect storage for garnish and and 'mise en place' generally
- Frozen storage next to the deep fry station

**Energy Usage**

Tested under the **ASHRAE 72:2005** Standard, the daily **Energy Usage** per Drawer unit is -

Refrigerator mode:  
**0.82 kWhr / 24 hrs**

Freezer mode:  
**1.73 kWhr / 24 hrs**

**Electrical**

**Mains Supply**  
120 Vac 60 Hz

**Running Current**  
2 Amps

**Defrost**  
Automatic Electric

**Supply Cord** (included)  
NEMA 5-15 3 Pin Socket  
& 2m Coiled Lead

**Temperature Flexibility**

Foods can be stored at the optimum set point anywhere in the range

+59°F ← → -7.6°F  
+15°C ← → -22°C

With the press of a button on the Controller the Chef can convert the Drawer from Refrigerator to Freezer operation (and vice versa) in little more than 30 minutes

**Operating Temperature**

Tested under **NSF/ANSI 7:2014**  
Adande Drawers operate efficiently in ambients up to **100.4°F (38°C)**

## Customised Two Drawer Prep Stations Variable Temp Unit + Extended Worktops



**VCR2/C/EXT48W**  
Standard Casters (C)  
Extended 48" Solid Worktop (EXT48W)

**VCR2/C/EXT60W**  
Standard Casters (C)  
Extended 60" Solid Worktop (EXT60W) with Storage Shelves



Note: Caster Based 60" Extensions can be fitted to the left or right


**Refrigerant**  
Energy Saving  
Hydrocarbon R290

# PREP STATION - TWO DRAWER - REAR ENGINE - COUNTER UNITS - VCR2 SERIES



## Plan View |

Prep Station (VCR2)  
with Open Drawer


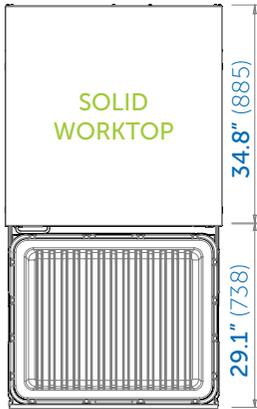


### Extended Tops

To accommodate larger equipment Solid Worktop (W) tops can be extended to 48" or 60"



## Elevations |

Counter Prep Station (VCR2)  
Standard Casters (C)  
Solid Worktop (W)

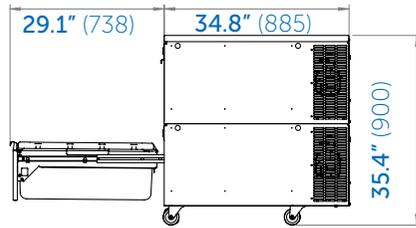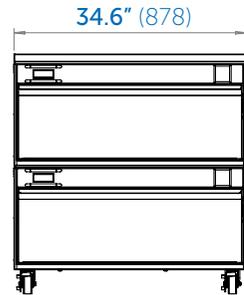

VCR2/CW (illustrated)

Extended Counter Prep Station (VCR2)  
Standard Casters (C)  
Extended Solid Worktop (EXT48W)

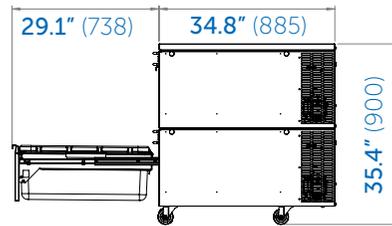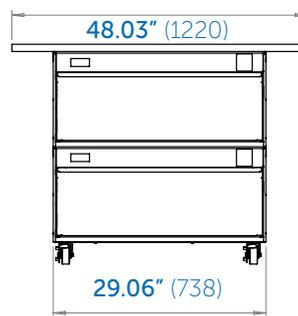

VCR2/C/EXT48W (illustrated)

## Top |



## Double Drawer Module




## Bases |



## Elevation |

Extended Counter Prep Station (VCR2)  
Standard Casters (C)  
Extended Solid Worktop (EXT60W)

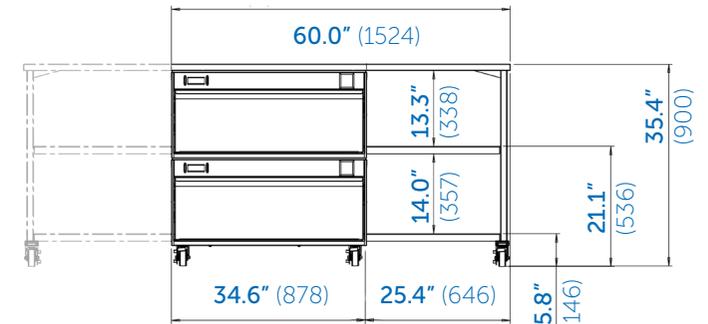

VCR2/C/EXT60W (illustrated - right hand extension)

## ADANDE USA - SPECIFICATION OPTIONS

### Rear Engine Two Drawer Prep Station

PREP STATION + SOLID WORKTOP (W)	High Caster Base (HC)	Standard Caster Base (C)	Small Caster Base (SC)
Finished Height	37.3" (948 mm)	35.4" (900 mm)	34.1" (867 mm)
Load Bearing Capacity	507 lb (230 kg)	507 lb (230 kg)	507 lb (230 kg)
	VCR2/HCW	VCR2/CW	VCR2/SCW

### Rear Engine Prep Station + Extended Worktops

PREP STATION + EXTENDED WORKTOP (EXT)	High Caster Base (HC)	Standard Caster Base (C)	Small Caster Base (SC)
Finished Height	37.3" (948 mm)	35.4" (900 mm)	34.1" (867 mm)
Load Bearing Capacity	507 lb (230 kg)	507 lb (230 kg)	507 lb (230 kg)
	VCR2/HC/EXT48W or VCR2/HC/EXT60W	VCR2/C/EXT48W or VCR2/C/EXT60W	VCR2/SC/EXT48W or VCR2/SC/EXT60W