



## Prep Counter Double Drawer Combo Unit

Standard Drawer Stacked On Top of a Shallow Drawer + Solid Worktop



### Refrigerant

Energy Saving  
Hydrocarbon R290

### Applications

- Combines a standard drawer on top of a shallow drawer
- Highly ergonomic storage solution, right at the point of use.
- Ideal for meat, deli and dessert prep.
- Perfect storage for garnish and 'mise en place' generally.

Two Year Parts & Labour  
(including the Gaskets)  
and a 5 Year Warranty  
on Compressors

### Operating Temperature

Tested under NSF/ANSI 7:2016  
Adande Drawers operate efficiently  
in ambients up to 100.4°F

### Operating Flexibility

With the press of a button on the controller  
the chef can convert the drawer from  
refrigerator to freezer operation (and vice  
versa) in little more than 30 minutes



### Storage Capacity

Maximum Weight  
154 lbs / 70 kg

Storage Volume  
5.3 cu ft (151 litres)

### Energy Usage

Tested under the  
ASHRAE 72:2018  
Standard, the daily Energy  
Usage per Drawer unit is -

Refrigerator mode:  
0.82 kWhr / 24 hrs

Freezer mode:  
1.73 kWhr / 24 hrs

### Electrical

Mains Supply  
120 Vac 60 Hz

Running Current  
2 Amps

Defrost  
Automatic Electric

Supply Cord (included)  
NEMA 5-15 3 Pin Socket  
& 2m Coiled Lead



PREP COUNTER - TWO DRAWER - COMBO UNIT - VSS2 SERIES


Options

PREP STATION + SOLID WORKTOP (W)	High Caster Base (HC)		Standard Caster Base (C)		Small Caster Base (SC)	
Finished Height	35.4" (899 mm)	VSS2/HCW	33.5" (850 mm)	VSS2/CW	32.2" (818 mm)	VSS2/SCW
Load Bearing Capacity	249 kg / 549 lbs		179 kg / 540 lbs		249 kg / 549 lbs	

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


Plan View

Standard Drawer Stacked On Top of Shallow Drawer (VSS2) With Open Drawer

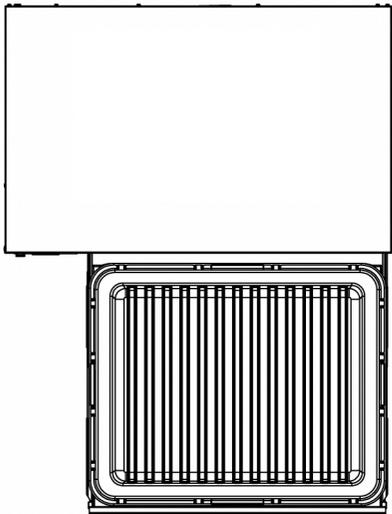

Elevation

Standard Drawer Stacked On Top of a Shallow Drawer (VSS2) Standard Castor (C) Solid Worktop (W)

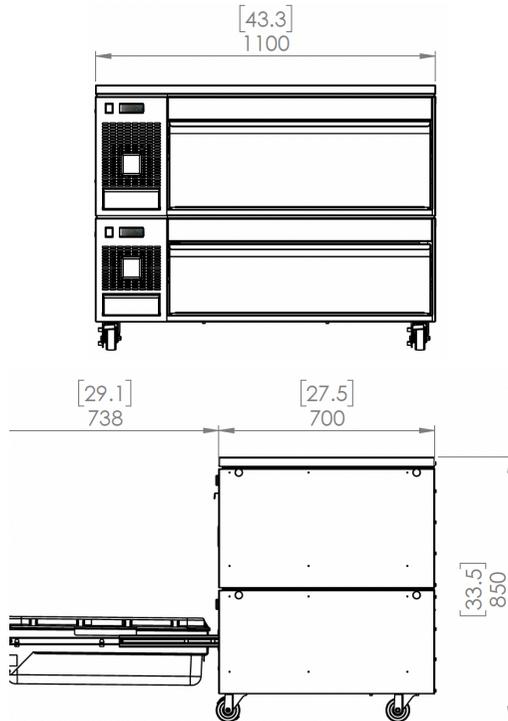

Tops



W (Worktop)  
0.4"  
(10 mm)

Drawer Module



VCS (Standard)  
15.35"  
(390 mm)



VLS (Shallow)  
13.34"  
(339 mm)

Base



HC  
6.2"  
(157 mm)



C  
4.3"  
(110 mm)



SC  
3.05"  
(77 mm)