

ED3-72 Display Case

UL



Drive foodservice profits with display cases from Alto-Shaam. LED lighting and mirrored back doors enhance food appearance and boost impulse sales. To not only look but taste great, food is held at optimal, precise temperatures with Halo Heat® technology and top ceramic heaters. Multiple access points and a removable back work shelf makes unloading and loading food effortless for employees. Reduce labor and cleaning time with removable back doors and side panels, and a lifting glass front.



ED3-72 with Legs



ED3(SYS)-72
With Stationary Base

Standard features

- Fanless, waterless Halo Heat technology
- Overhead LED lighting
- Adjustable thermostats 1-10 per heat zone for top and bottom heat
- Ceramic top heaters
- Operator-side work shelf and cutting board
- Sliding back doors with mirrored glass
- Tempered glass front with self-supported lifting mechanism
- Removable back doors and side glass panels
- One set of 4" (102mm) legs with rubber feet
- Five (5) pan zones to hold standard pan sizes (GN)
- Two (2) heat zones
- Two (2) heat-on indicator lights
- Four (4) long pan dividers (1002584)
- Five (5) short pan dividers (1002621)
- Fifteen (15) short pan dividers (11318)

Configuration

- ED3-72 with 4-inch legs and rubber feet (standard)
- ED3(SYS)-72 with stationary base

Electrical

- 208V, 50/60 Hz, 1PH
- 240V, 50/60 Hz, 1PH

Options and Accessories

Panel Color (select one)

- Black, standard
- Stainless steel, optional

End Glass (select one)

- Clear glass, standard
- Solar bronze glass, optional (5011353)

Additional

- Temperature gauge (GU-48153)
- Right-mounted scale platform (5001307)
- Left-mounted scale platform (5001308)
- Work shelf with gravy lane (5005639)
- Pan insert (4" deep) (1001990)
- 1/3 Pan cover-up bar (1008014)
- Sheet pan divider bar package (5002803)

Extended warranty

- One-year warranty extension

| Pan* Capacity | | | |
|---|-----------------------------|---------------|------|
| Pan Size | Pan Dimensions | | Qty. |
| Full-Size & One-Third**: | 12" x 20" x 2-1/2" (GN 1/1) | | 5 |
| | 12" x 6" x 2-1/2" (GN 1/3) | | 5 |
| Half-Size & One-Third**: | 12" x 10" x 2-1/2" (GN 1/2) | | 10 |
| | 12" x 6" x 2-1/2" (GN 1/3) | | 5 |
| Full-Size Sheet Pans: | 18" x 26" x 1" | | 3 |
| Max. Capacity/Volume: | 80 lbs (36 kg) | 50 qts (60 L) | |
| <small>* Pans are not included with display case. ** Will also accept 4" (100mm) deep pans.</small> | | | |




ED3-72 Display Case



DIMENSIONS

ED3-72 with Legs

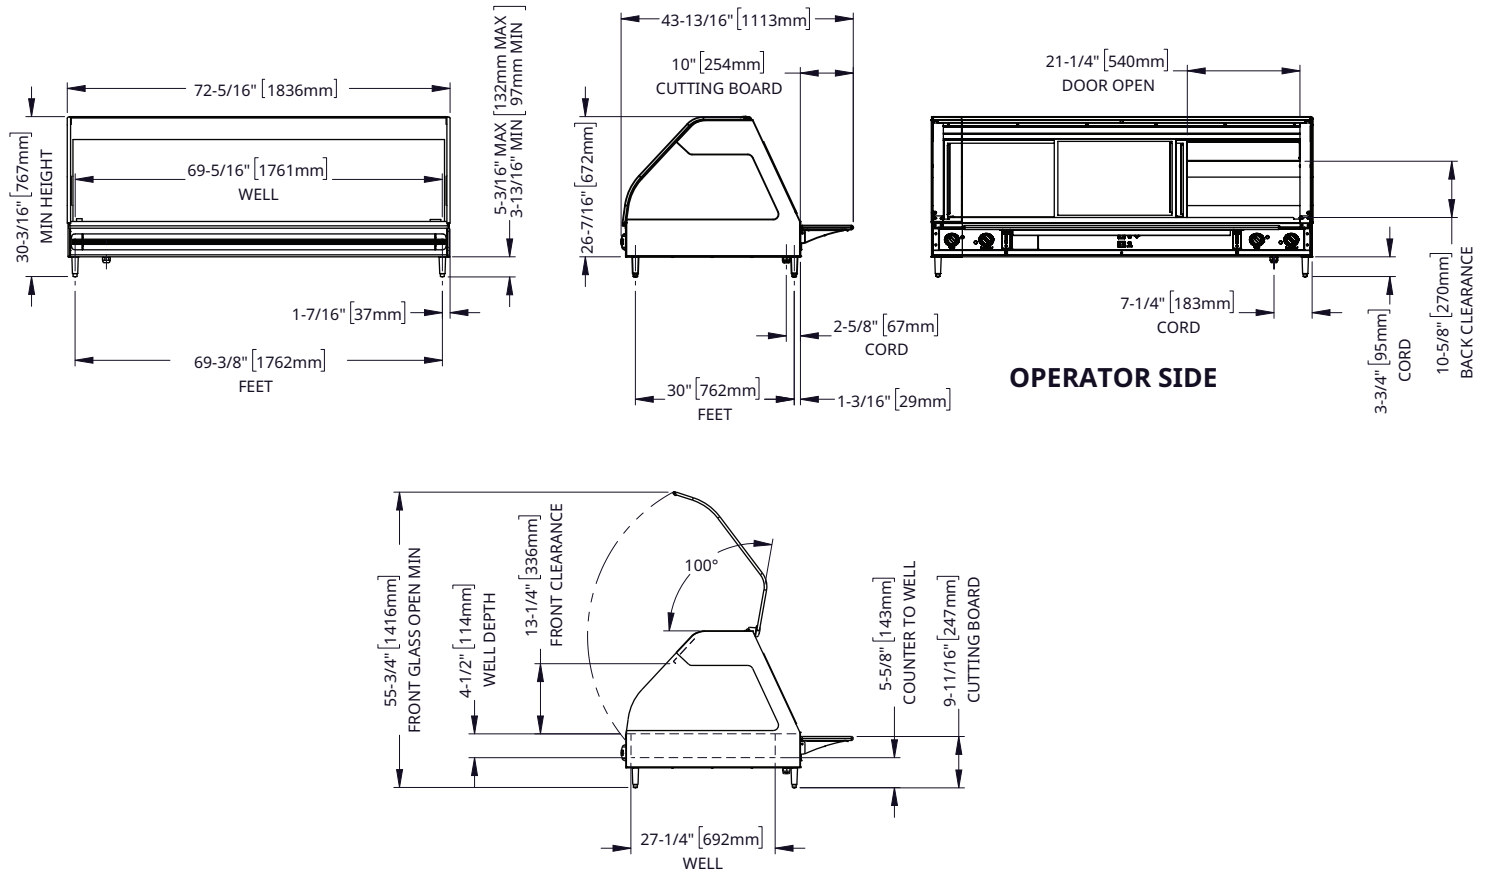

Model

ED3-72
Legs

Exterior (H x W x D)

30-3/16" x 72-5/16" x 43-13/16" [767mm x 1836mm x 1113mm]

Well (W x L x D)

27-1/4" x 69-5/16" x 4-1/2" [692mm x 1761mm x 114mm]

Net Weight

419 lb [190 kg]

Ship Dimensions (H x W x D)*

45" x 85" x 55" [1143mm x 2159mm x 1397mm]

Ship Weight*

465 lb [210 kg]


*Domestic ground shipping information. Contact factory for export weight and dimensions.

ED3-72 Display Case



DIMENSIONS

ED3(SYS)-72 with Stationary Base

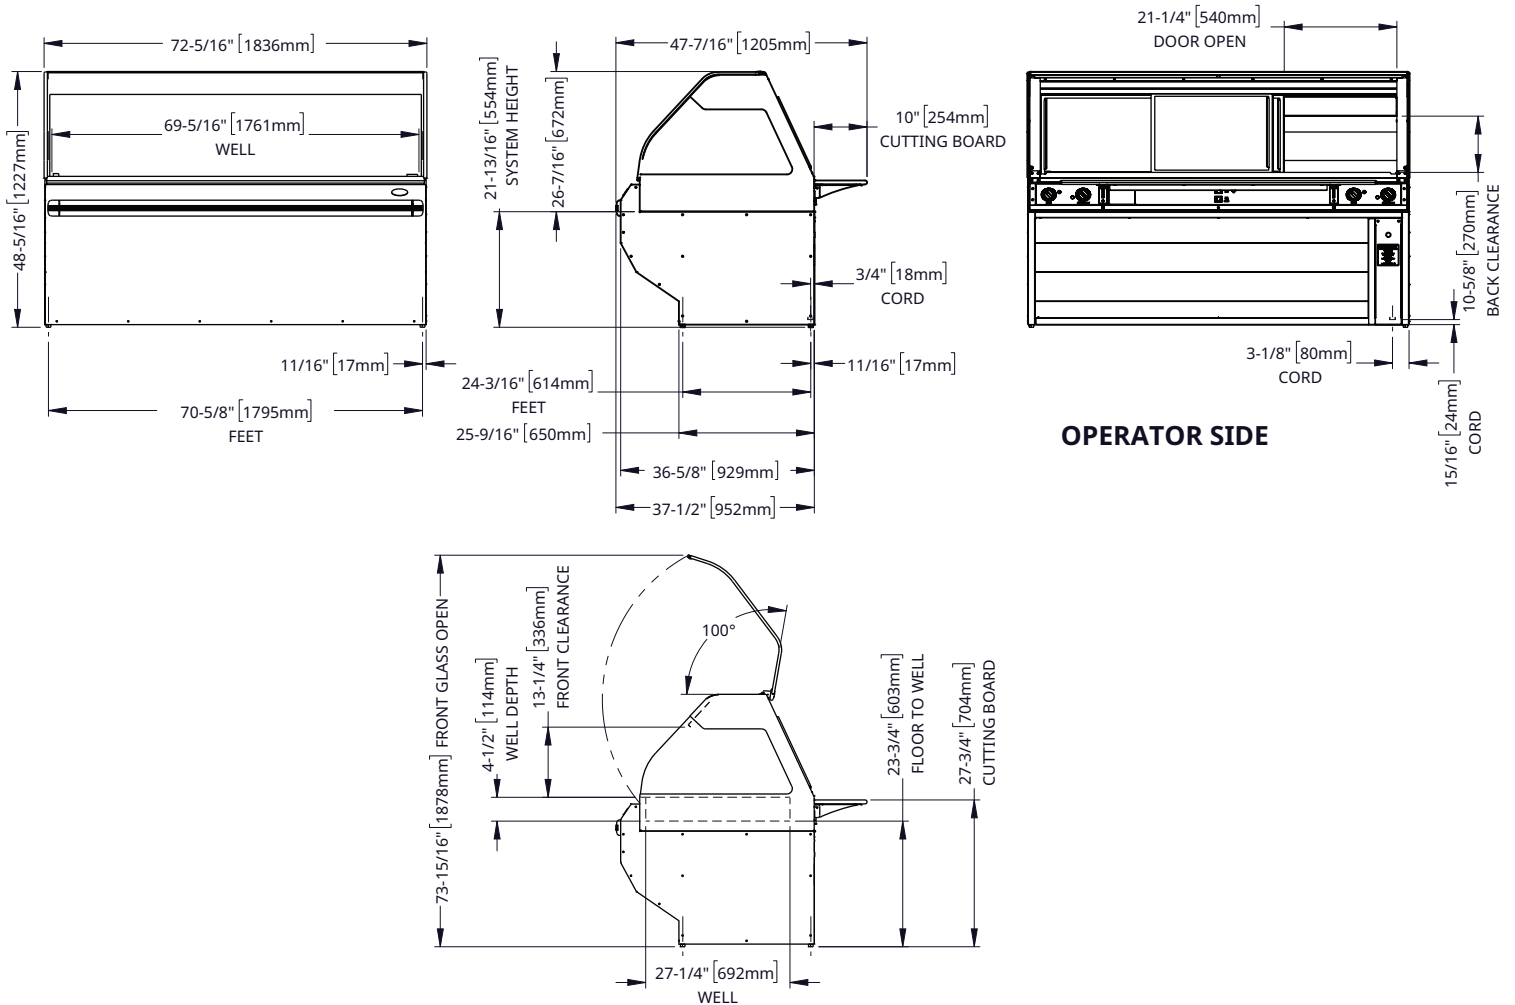

Model

ED3-72
SYS

Exterior (H x W x D)

48-5/16" x 72-5/16" x 47-7/16" [1227mm x 1836mm x 1205mm]

Well (W x L x D)

27-1/4" x 69-5/16" x 4-1/2" [692mm x 1761mm x 114mm]

Net Weight

621 lb [282 kg]

Ship Dimensions (H x W x D)*


65" x 85" x 55" [1651mm x 2159mm x 1397mm]

Ship Weight*

700 lb [317 kg]

*Domestic ground shipping information. Contact factory for export weight and dimensions.

ED3 Pan Configurations

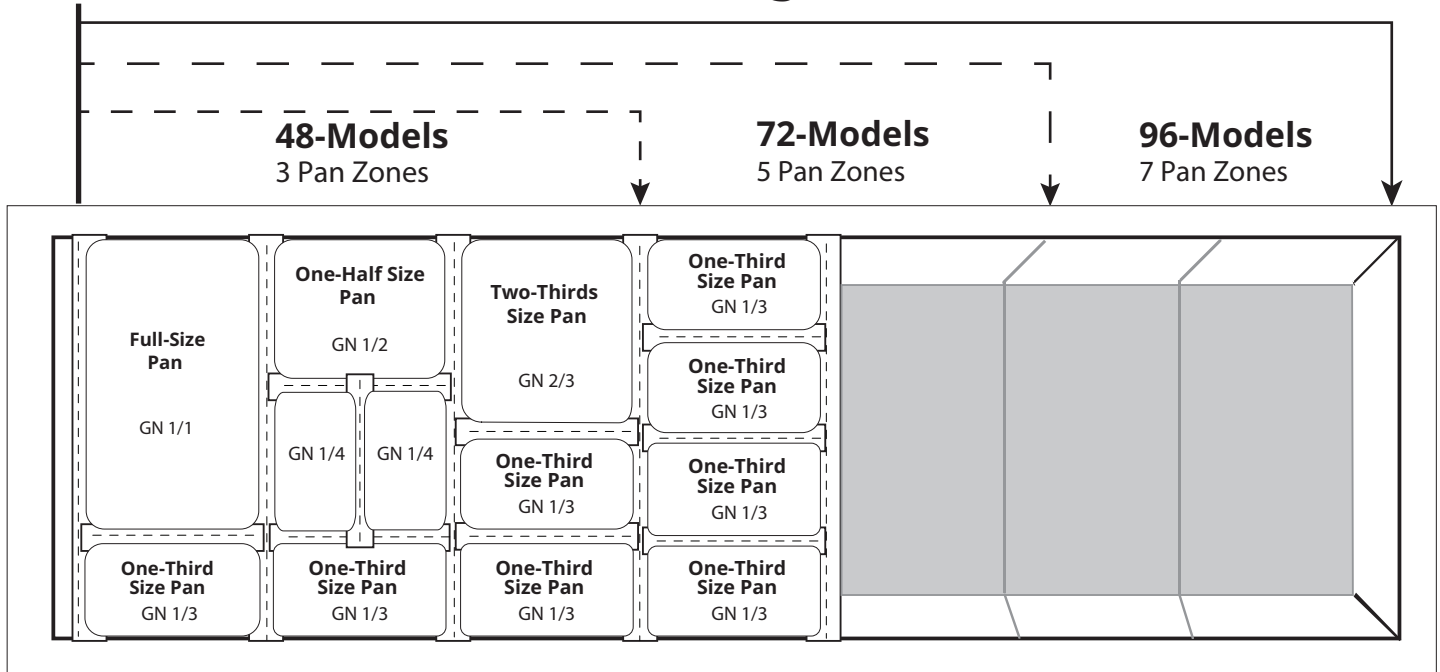

REQUIREMENTS

Installation Requirements

- The display case must be installed level.
- The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.



72 Series

| ED3-72 With feet | V | Ph | Hz | AWG* minimum | A | Breaker minimum | kW | Connection |
|---------------------|-----|----|-------|-----------------|------|--------------------|------|----------------|
| | 208 | 1 | 50/60 | 14 | 15.0 | 19A | 3.11 | 6ft; NEMA 6-30 |
| | 240 | 1 | 50/60 | 14 | 17.2 | 22A | 4.14 | 6ft; NEMA 6-30 |

*Recommended minimum conductor sized at 90°C and ambient 30°C.
Electrical connections must meet all applicable federal, state, and local codes.

| ED3-72 With base | V | Ph | Hz | AWG* minimum | A | Breaker minimum | kW | Connection |
|---------------------|-----|----|-------|-----------------|------|--------------------|------|------------------|
| | 208 | 1 | 50/60 | 14 | 15.0 | 19 A | 3.11 | No cord, no plug |
| | 240 | 1 | 50/60 | 14 | 17.2 | 22 A | 4.14 | No cord, no plug |

* Recommended minimum conductor sized at 90°C and ambient 30°C.
Electrical connections must meet all applicable federal state and local codes

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com