

## TEPPANYAKI GRIDDLE

GAS TYPE:  NATURAL  LP

- ARTY-24     ARTY-36
- ARTY-48     ARTY-60

### STANDARD FEATURES

- Stainless steel exterior body
- 3/4" thick and 24" deep steel griddle plate
- 30,000 BTU/hr. round burner creates a hot zone in the center of the griddle
- Large capacity removable grease can
- Stainless steel grease channel and one piece rolled front for easy cleaning
- Two year limited warranty, parts, and labor

### OPTIONAL FEATURES

- 1/2" side splash and back splash available



### Model Shown ARTY-48


Shown with optional 1/2" side splash and back splash

### DESCRIPTION

American Range, Teppanyaki Griddle, stainless steel exterior body. 3/4" thick and 24" deep steel griddle plate. 30,000 BTU/hr. round burner creates a hot zone in the center of the griddle. Large capacity removable grease can. Stainless steel grease channel and one piece rolled front for easy cleaning. Two year limited warranty, parts, and labor.



# TEPPANYAKI GRIDDLE

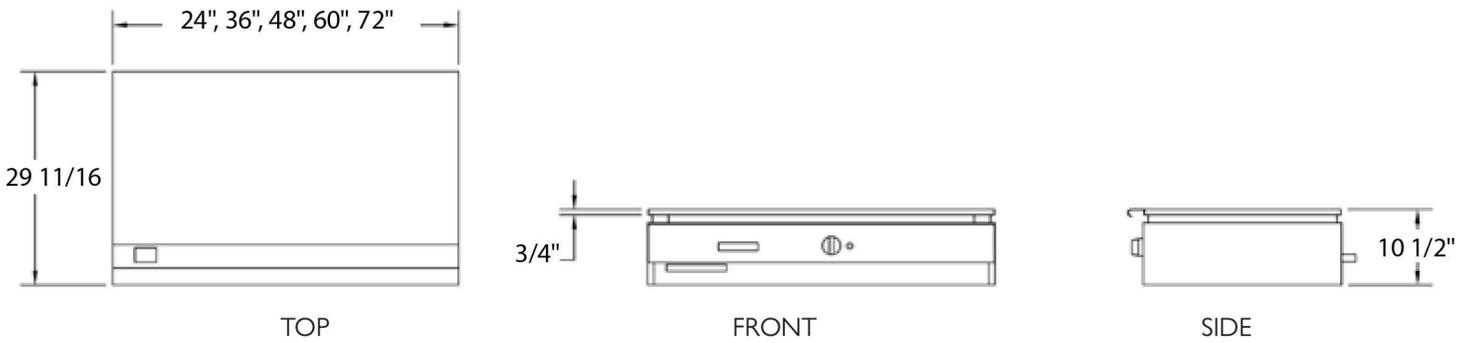

SHIPPING WEIGHT\*

| MODEL   | BURNERS | WIDTH (MM) | DEPTH (MM)      | HEIGHT (MM)   | BTU/hr. | (KW) | LBS | (KG)  |
|---------|---------|------------|-----------------|---------------|---------|------|-----|-------|
| ARTY-24 | 1       | 24" (610)  | 29 11/16" (754) | 10 1/2" (267) | 30,000  | (9)  | 200 | (91)  |
| ARTY-36 | 1       | 36" (914)  | 29 11/16" (754) | 10 1/2" (267) | 30,000  | (9)  | 300 | (136) |
| ARTY-48 | 1       | 48" (1219) | 29 11/16" (754) | 10 1/2" (267) | 30,000  | (9)  | 365 | (166) |
| ARTY-60 | 1       | 60" (1524) | 29 11/16" (754) | 10 1/2" (267) | 30,000  | (9)  | 450 | (204) |



Shown with optional stainless steel all welded 1/2" griddle splash plate. Must be specified when placing your order this can not be field installed.

- Specify type of gas and altitude if over 2000 feet.
- Please specify gas type when ordering.

## COMBUSTIBLE WALL CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear. Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard, NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

| MANIFOLD PRESSURE |             |               |
|-------------------|-------------|---------------|
| NATURAL GAS       | PROPANE GAS | MANIFOLD SIZE |
| 5.0" W.C.         | 10.0" W.C.  | 3/4" (19MM)   |

\*Shipping weight includes packaging and is approximate.

