



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Worktop Refrigerators & Freezers with Backsplash

Standard Features

- Stainless steel exterior & interior with reinforced stainless steel top with foamed in place backsplash
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Refrigerators maintain temperatures between 35°F – 38°F
- Freezers maintain temperatures between -8°F – 0°F
- Field reversible door(s)
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- One (1) pre-installed shelf per section

Optional Accessories

- Extended warranty up to 5 years

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

MODELS:

**AWR27SD / AWR36SD / AWR48SD / AWR60SD / AWR72SD
AWF27SD / AWF36SD / AWF48SD / AWF60SD**



AWR27SD / AWF27SD



AWR36SD / AWF36SD



AWR48SD / AWF48SD



AWR60SD / AWF60SD



AWR72SD



**2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY**



REV. 05/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
AWR27SD	1	6.53	2	5	3.4	115/60/1	1/7+	R290	27 ^{1/2} ×30×38 ^{7/8}	143	198
AWF27SD	1	6.53	2	5	3.9	115/60/1	1/5	R290	27 ^{1/2} ×30×38 ^{7/8}	143	198
AWR36SD	2	8.97	4	5	3.4	115/60/1	1/7+	R290	36 ^{3/8} ×30×38 ^{7/8}	172	236
AWF36SD	2	8.97	4	5	4.8	115/60/1	1/4+	R290	36 ^{3/8} ×30×38 ^{7/8}	172	236
AWR48SD	2	12.22	4	5	3.4	115/60/1	1/7+	R290	48 ^{1/4} ×30×38 ^{7/8}	201	278
AWF48SD	2	12.22	4	5	4.8	115/60/1	1/4+	R290	48 ^{1/4} ×30×38 ^{7/8}	201	278
AWR60SD	2	15.5	4	5	3.9	115/60/1	1/5	R290	60 ^{1/4} ×30×38 ^{7/8}	227	324
AWF60SD	2	15.5	4	5	4.8	115/60/1	1/4+	R290	60 ^{1/4} ×30×38 ^{7/8}	227	324
AWR72SD	3	18.89	6	5	3.9	115/60/1	1/5	R290	72 ^{5/8} ×30×38 ^{7/8}	258	370

PLAN VIEW



AWR27SD/AWF27SD

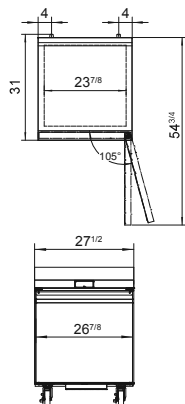

AWR36SD / AWF36SD


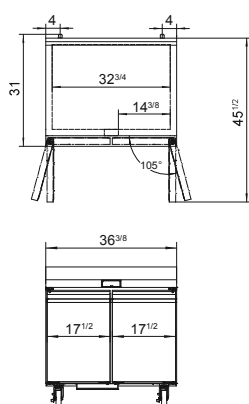


AWR48SD / AWF48SD


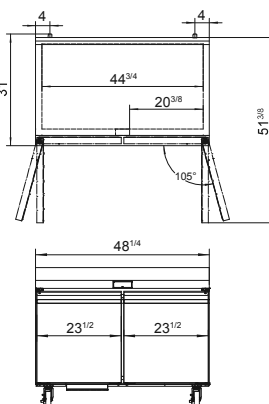


SIDE VIEW


AWR60SD / AWF60SD

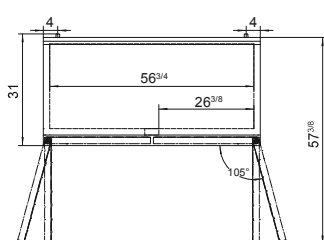

AWR72SD

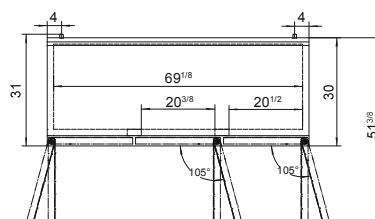


Casters

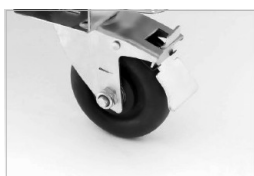

Epoxy shelves



Rear grate



NEMA 5-15P



NEMA
15A/125V