

Dough Sheeter with 28" (710mm) Table Length*

ITEM: 48763
MODEL: BE-IT-0710



Movable
Safety Guard



Thickness
Adjustment



Control Panel

The best dough sheeter for your bakeries, restaurants and hotels.

FEATURES:


- Aluminium die-cast shoulders and casing
- Possibility of working all types of dough, obtaining very thin results
- Galvanized hard chrome plated, ground and polished cylinders
- Easy to remove scrapers, for quick and efficient cleaning
- Unique design prevents dough sheets from wrinkling
- Folding tables to reduce machine space when not in use
- Low voltage electrical system with dual commands (hand and foot pedal)
- Accident prevention safety guards connected to the electrical system by limit switches
- Machine mounted on wheels making it fully mobile

1-833-487-3686

www.trentoequipment.com

sales@trentoequipment.com

Follow us on social media
[@trentoequipment](#)

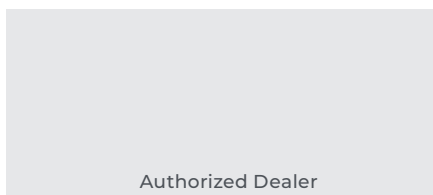

Authorized Dealer



WARRANTY
PARTS AND LABOUR




Technical Specification

Feature	Floor Model
Item	48763
Model	BE-IT-0710
Dough Quantity	11 lb. (5 kg.)
Sheeting Thickness	0-1.4" (0 - 35 mm)
Power	750 W
Electrical	220V/ 60Hz / 1Ph
Belts Speed	0.275 - 0.475 m/s
Cylinder Length	19.7" (500 mm)
Cylinder Diameter	2.4" (60 mm)
Table Length	28" (710 mm)
Net Weight	326.3 lb. (148 kg)
Working Dimensions (WDH)	70.8" x 34.6" x 43.3" (1800 x 880 x 1100 mm)
Closed Dimensions (WDH)	23.6" x 34.6" x 57.5" (600 x 880 x 1460 mm)
Gross Weight	359.4 lb. (163 kg)
Gross Dimensions (WDH)	36.2" x 24.8" x 63.8" (920 x 630 x 1620 mm)



Technical Drawing

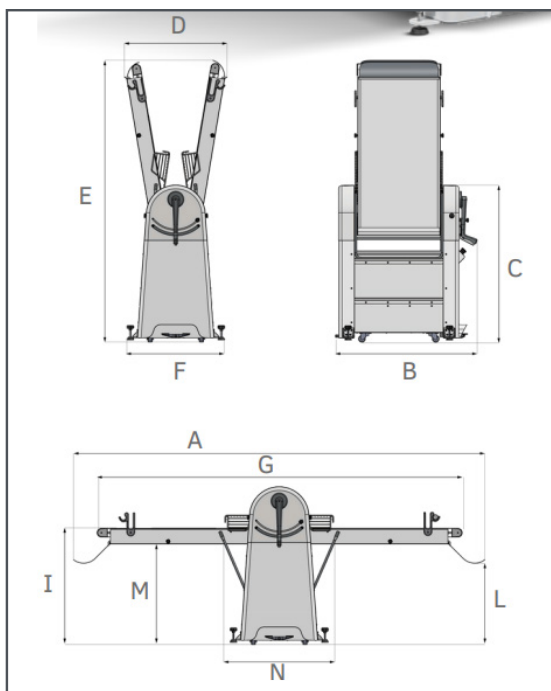

Model	48763	48764	48765
Cylinder length(mm)	500	600	600
Cylinder diameter (mm)	70	70	70
Max cylinder opening (mm)	35	35	35
Worktop length (mm)	710	1200	1500
Power (kW)	0,75	0,75	0,75
Weight (kg)	180	226	238
A (mm)	1820	2760	3380
B (mm)	915	1015	1015
C (mm)	1160	1160	1160
D (mm)	650	890	1070
E (mm)	1470	1960	2250
F (mm)	695	695	700
G (mm)	1480	2460	3080
I (mm)	850	850	850
L (mm)	620	620	620
M (mm)	735	735	735
N (mm)	800	800	800

Floor Model Updated Features (2025 Model Only)

