

## BUNN Crescendo<sup>™</sup>



### Model Crescendo

Dimensions: 14.1" x 19.8" x 31.2"  
(35.8cm x 50.3cm x 79.2cm)

## Features

### Bean-to-Cup Espresso

- Precision burrs are used for clean-cut milling of the beans and assurance of superior grounds production
- Engineered with three powder hoppers: two 3.3 lb (1.5 kg) hoppers for popular beverages and one 2.2 lb (1 kg) hopper for a additional selection
- Prominent 2.2 lb (1 kg) bean hopper allows for full visibility of fresh whole beans
- Spent pucks are automatically deposited in a 70-puck capacity holding bin: optionally, spent pucks may be eliminated via a through-counter chute
- Touchpad features two programmable portion sizes of 8 to 12 oz (230 to 350 ml) each, up to nine beverage choices, plus hot water
- Tactilely pleasing Waterfall design, built upon a compact footprint
- The sleek, lustrous nozzle guides the cup to the 5.5" (140.5 mm) dispense area
- Tamping sensor ensures consistently excellent coffee puck compaction
- 9 bar pressure assures optimal extraction and, coupled with a variable brew group, produces superb single or double shots, each finished with a handsome crema
- Adjustable speed auger motors deliver reliable performance, routinely fulfilling ingredient portioning requirements
- Designed, engineered and assembled by BUNN in the USA

## Related Products

### Easy Clear<sup>®</sup> EQHP-10

Product No. : 39000.0004



### CARTRIDGE, EQHP-10CRTG

Product No. : 39000.1004



## Model

Crescendo

## Agency Listing



# Dimensions & Specifications




| Model     | Product #  | Volts | Amps | Tank Htr Watts | Total Watts | Capacity per hour | Cubic ft <sup>3</sup> /m <sup>3</sup> | Weight lbs/kg | Cord Attached |
|-----------|------------|-------|------|----------------|-------------|-------------------|---------------------------------------|---------------|---------------|
| Crescendo | 44300.6201 | 120   | 11   |                | 1320        | 40 double shots   | 9.5/.27                               | 101/45.8      | yes           |

Capacity: Incoming water temp of 60°F (15.5°C)

Electrical: Requires 2-wires plus ground service rated 120V, single phase, 60Hz. Brewer is supplied with a cordset and a NEMA 5-15P plug. Receptacle is not included (NEMA 5-15P).

Plumbing: 20-90 psi (137-620 kPa). Supplied with 3/8" male flare fitting and garden hose fitting.

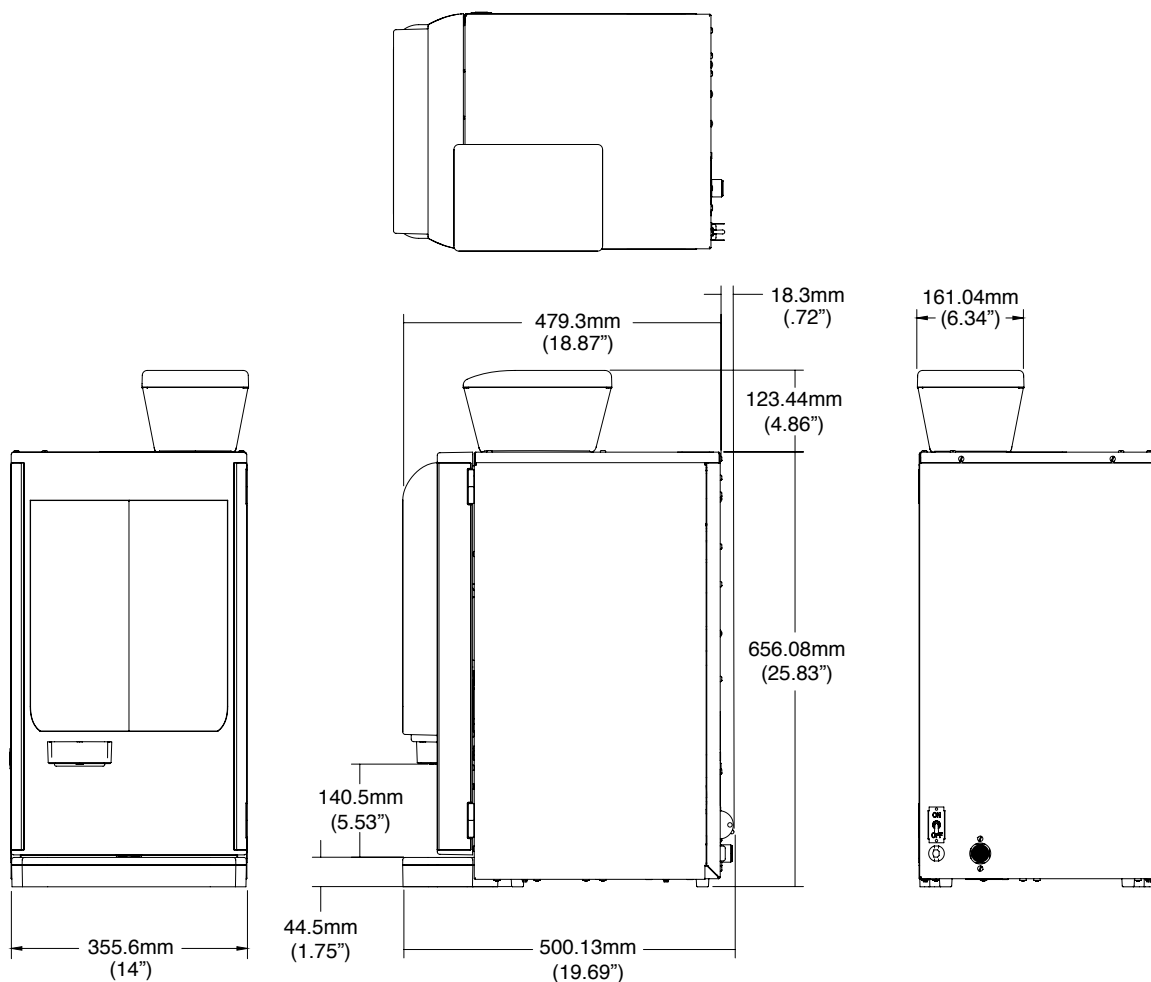

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.