Infusion Series ICB Soft Heat® Coffee Brewer

Infusion Series ICB Soft Heat®
(server sold seperately)
Dimensions: 11.8" x 23.4" x 32.8"
(30cm x 59.4cm x 83.3cm)

Features

Infusion Series ICB Soft Heat® Brewer

- Sleek, modernized design language on the brewer and servers
- Rounded angles on the corners and trunk
- Coordinating petal-shaped handles on brew basket, dispenser faucet, and hot water faucet create intuitive visual cues for user-interaction
- Contrasting stainless steel and black colors create a distinctive, refined look
- Better positioned fast flow hot water faucet with greater cup clearance
- Bright blue LED light indicators prominently show unit is operational
- BUNN Infusion Series technology allows for multiple recipes from one footprint with six brew buttons and three batch sizes
- Brew batches of .5gal, 1gal or 1.5gal (1.9, 3.8 or 5.7L)
- Exclusive Peak Extraction™ Sprayhead is multi-directiona with a 17-hole design to ensure ultimate uniformity of extraction
- USB programming
- New Soft Heat® servers are ergonomic, lighter weight, energy efficient and now offer programmable recipe/batch based holding times and temperatures, alerting staff when freshness has expired or server is empty
- Wireless Server monitoring available

Related Products

1.5 Gal SH Server
Product No. : 27850.6200
Dimensions:
14.5" H x 9.1" W x 13.3" D
Capacity: 1.5gal/5.7L

2SH Stand
Product No. : 27875.6200
Dimensions:
9.3" H x 20.2" W x 11.8" D

Single Drip Tray
Product No. : 53452.0001

1SH Stand
Product No. : 27825.6200
Dimensions:
9.3" H x 10.2" W x 11.8" D

Dual Drip Tray
Product No. : 53452.0000

Model	Agency Listing
Infusion ICB SH	c UL us, NSF

Dimensions & Specifications CANADA

Model	Product #	Volts	Amps	Total Watts	Capacity per hour	Cubic ft³/m³	Weight lbs/kg	Cord Attached
Infusion ICB SH	51100.6100	120/240	16.8	4050	10.1gal/38.5L	9.31/0.26	47.5/21.5	No
Infusion ICB SH	51100.6102	120/208	17.3	3600	10.1gal/38.5L	9.31/0.26	47.5/21.5	No
Infusion ICB SH w/wireless	51100.6103	120/240	16.8	4050	10.1gal/38.5L	9.31/0.26	47.5/21.5	No

Capacity: Incoming water temp of 60°F (15.5°C)
Electrical: Requires 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.
Plumbing: 20-90 psi (138-621 kPa). Supplied with 3/8" male flare fitting.

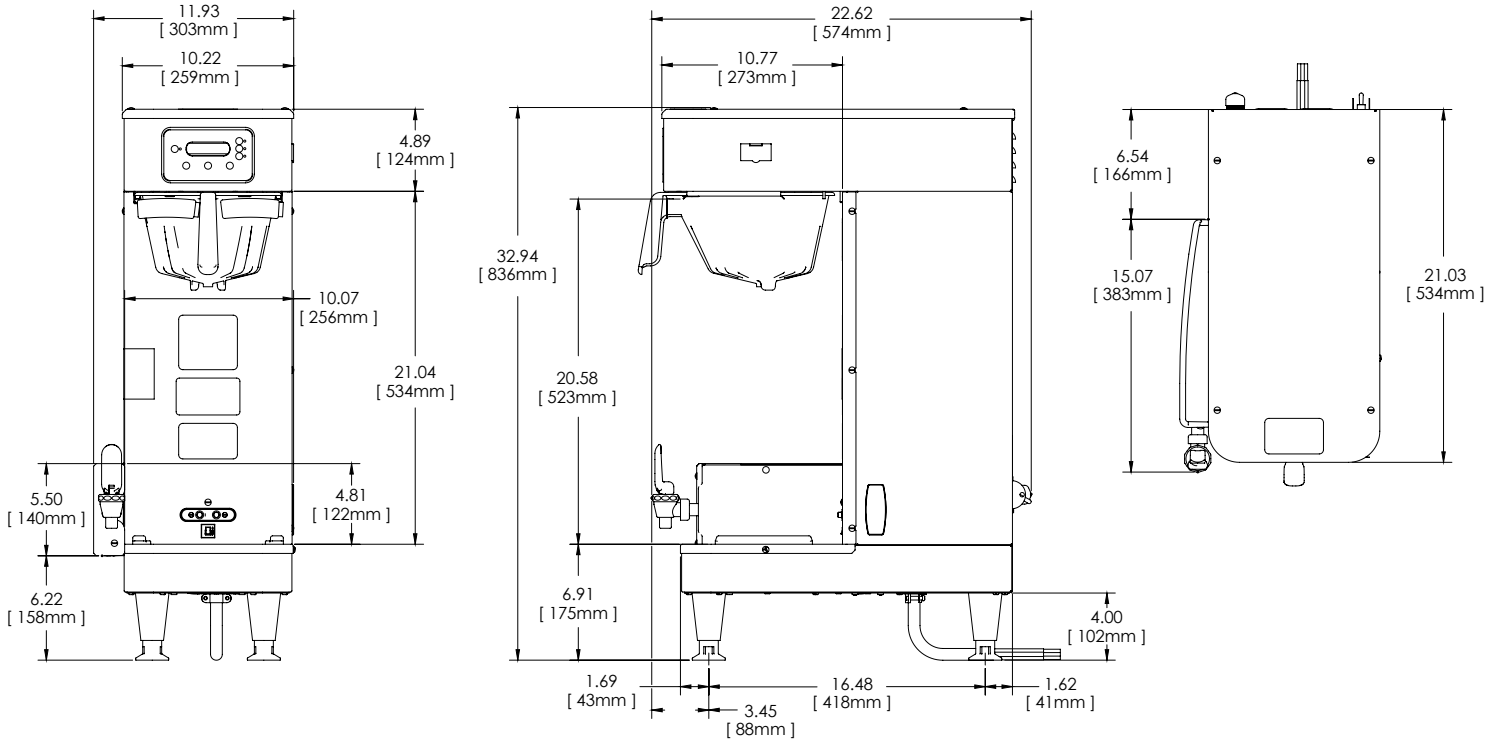

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
All dimensions shown in centimeters.

1/16 © Bunn-O-Matic Corporation