

Infusion Series ITCB-DV



ITCB-DV Infusion

(Server sold separately)

Dimensions: 35.0" x 24.3" x 11.6"
(88.9cm x 61.7cm x 29.5cm)

Features

- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 7-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Brews into all BUNN iced tea dispensers (except TDS-5), 1.9 to 3.8 liter airpots, thermal carafes --- and can accommodate BUNN ThermoFresh® Servers [servers not included]
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Related Products

WATER FILTER, EQHP-5C

Product No. : 39000.0014



CARTRIDGE, EQHP-5CCRT

Product No. : 39000.1014



Model

ITCB-DV Infusion

Agency Listing



Dimensions & Specification







Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft3/m3	Weight lbs/kg	Cord Attached
ITCB-DV Infusion	52300.6100	120	14		1700	80 8oz. cups	9.8/0.27	47.6/21.5	yes
		120/208	13		2650	123 8oz. cups	9.8/0.27	47.6/21.5	
		120/240	15		3500	163 8oz. cups	9.8/0.27	47.6/21.5	

Capacity: Incoming water temp of 60°F (15.5°C)

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V, single phase, 60 Hz. Brewer is supplied with a NEMA 5-15P plug. Receptacle is not included (NEMA 5-15P).

Plumbing: 20-90 psi (138-621 kPa). Supplied with 1/4" male flare fitting and garden hose fitting.

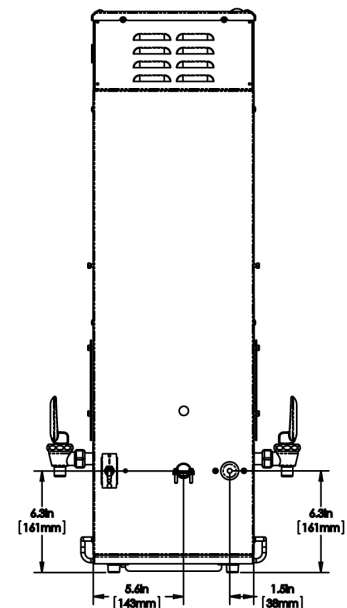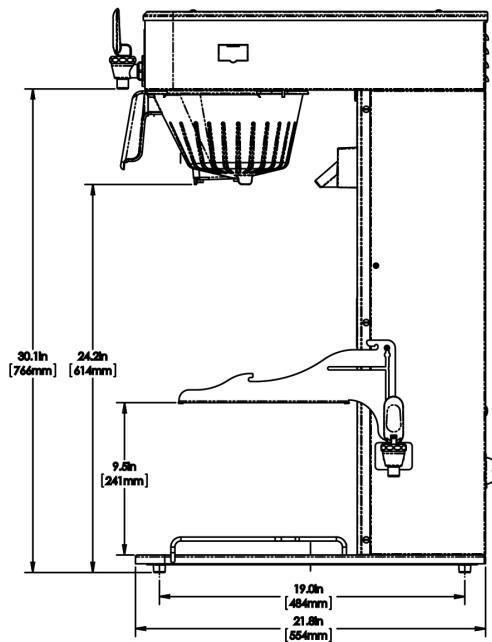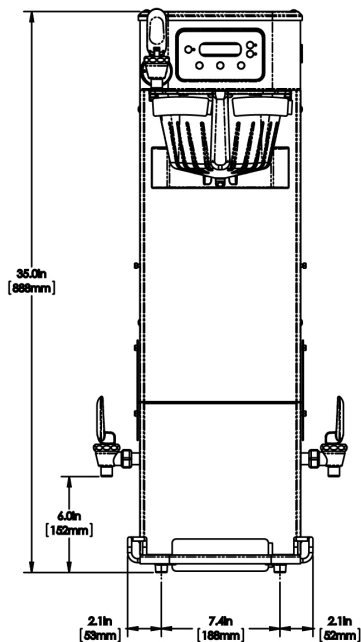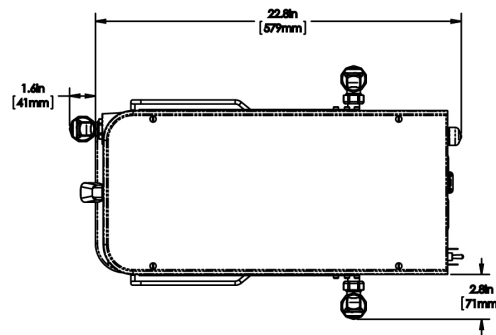

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.