

Blueair by
BLUENIX

**MODEL BGM47SLW-HC
GLASS DOOR
MERCHANDISER
REFRIGERATOR**

Sleek and durable cooling solution for food and beverages.



**Temperature range between
33°F ~ 39°F**

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



**Visual and audible door
open alarm**

Alarm sounds when doors are not completely closed to protect against food spoilage

Cabinet construction

- Black or white painted steel exterior and white painted steel interior
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Sturdy, epoxy coated wire shelves with adjustable shelving height
- 4 shelves per compartment.
- Four 4" Diameter swivel casters with front brakes standard.
- Approved for pre-packaged foods only (e.g., shrink-wrapped or sealed items). Open or unpackaged foods are not permitted.

Refrigeration

- Self-contained system, bottom mounted compressor
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance.
- Epoxy coated evaporator reduces potential corrosion
- Bottom mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Front sliding refrigeration unit allows the unit to be serviced without being moved.

Exterior Dimensions (inches/mm)

| L | D | H |
|---------|---------|---------|
| 54 3/8" | 30 1/8" | 84" |
| 1381 mm | 768 mm | 2135 mm |


Weight (lbs/kg)

| Net Weight | Ship Weight |
|------------|-------------|
| 385 lbs | 440 lbs |
| 175 kg | 220 kg |




Conforms to NSF/ANSI 7(ETL)


Front view

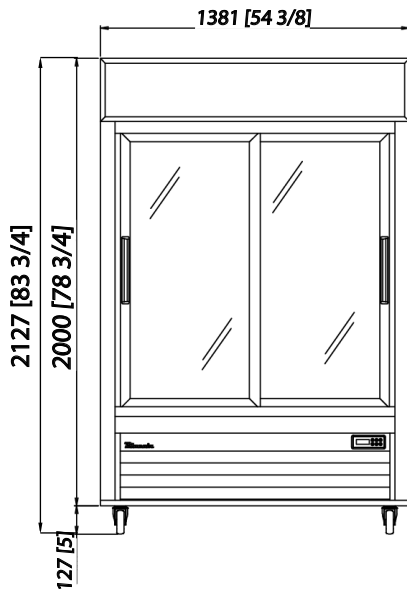

Side view

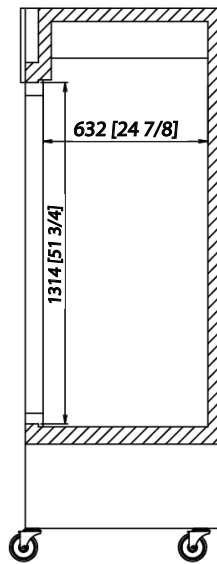

Top view

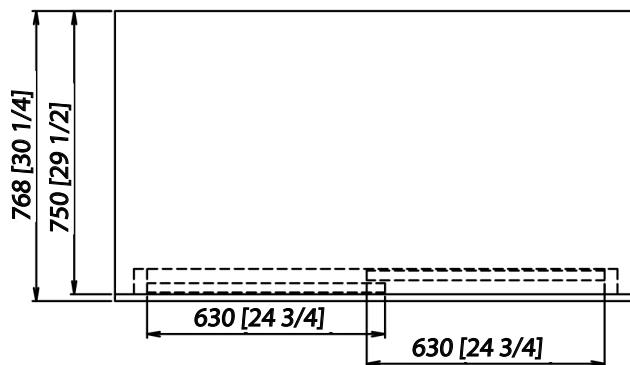

Doors

- Sliding door
- Durable door gasket with easy replacement.
- Door designed to open easily.
- Double pane glass technology for energy efficiency.

Design & Features

- Digital temperature control & monitor system
- Keep products safe by maintaining constant temperatures
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration
- Controls include automatic evaporator fan motor delays

Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable legs available
- Additional shelves are available.

| | |
|----------------------|--|
| Doors | 2 |
| Capacity Cu.Ft. | 41.00 |
| Shelves | 8 |
| Refrigerant | R-290 |
| Temperature Range | 33°F ~ 39°F |
| Easy Maintenance | Sliding Condensing Unit |
| Connection | 9.8 ft long (3m) flexible three wire cord with modeled plug |
| Lighting | LED Interior lighting |
| HP | 1/2 |
| Voltage | 115V/60Hz |
| Amps | 7.0 |
| NEMA Config. | NEMA 5-15 |



- This product may expose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

- Ce produit peut vous exposer à des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Etat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

Blueair by
BLUENIX

Blue Air has right to change specifications without further notice.



blueairfse.com



orders@blueairfse.com



223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 470-625-0182

7025 Amwiler industrial Drive, Suite A, Atlanta GA
T: 908-688-0970