



# 191

BAR E P

Countertop  
Pump-Fed Soft Serve  
Model for maximum  
overrun control,  
hygiene & ease of use



**Performance and Quality** The Carpigiani reputation for the smoothest, creamiest soft serve in the market is proven with this powerful, customizable model. Spigot flow allows for adjustable product flow. Product is fed from rear of cylinder eliminating need to prime and allowing more controllable overrun. The Optional Star Door allows you to use different nozzles to create unique shapes and monoportion products.



**Convenience** Audible Signal alerts when refill is needed. Least number of components to clean in the industry.



**Savings** Unique cylinder construction delivers better results using less electricity. Water-cooled & Air Cooled versions available.



**Safety** TEOREMA guarantees facilitated assistance by providing on-line monitoring and diagnosis on a tablet, phone or PC wherever you are.



**Hygiene** Standby mode maintains safe product temperatures in the freezing cylinder, utilizing minimal energy during idle periods.



Carpi Care kit




Carpi Clean kit\*



\*request the kits from your distributor to maintain your machine hygienically clean.

[carpigiani.com/us](http://carpigiani.com/us)

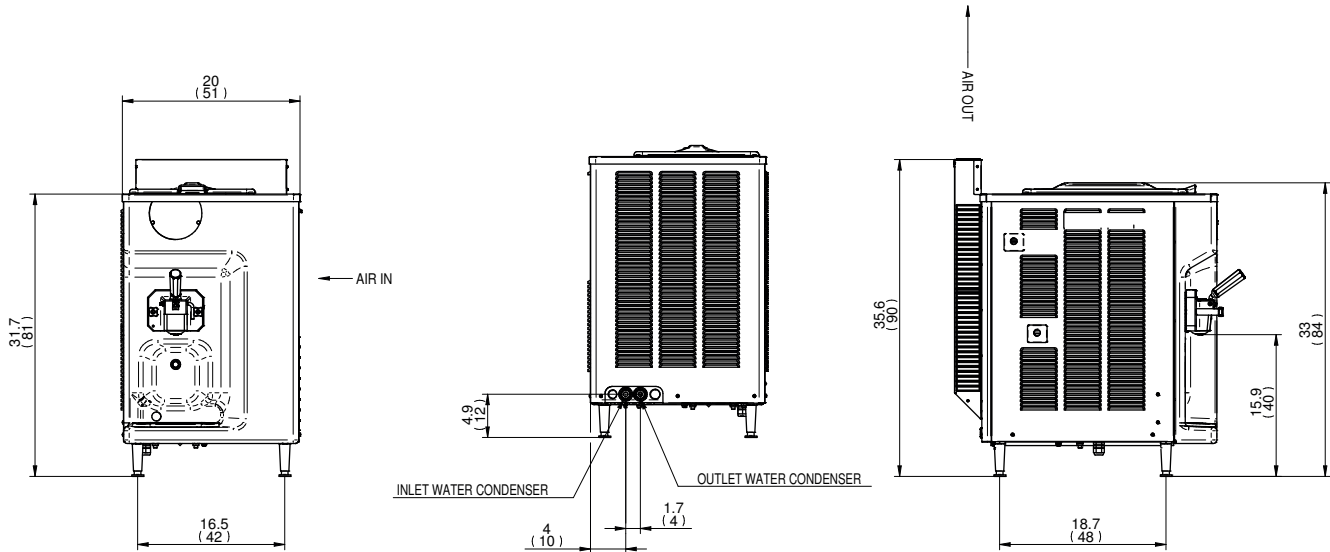

	WATER		AIR	
	lbs.	kgs.	lbs.	kgs.
<b>Weights</b>				
Net	309	140	309	140
Crated	359	163	359	163
	cu. ft.	cu. m.	cu. ft.	cu. m.
Volume	30.01	0.85	30.01	0.85
<b>Dimensions</b>	in.	cm.	in.	cm.
Width	20.01	51	20.01	51
Depth	27.7	70	29.5	75
Height	35.4	90	35.4	90
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P)	Wires (W)
208-230/60/1 Water	30A	25/27A	1P, 1W	
208-230/60/1 Air**	30A	25/27A	1P, 1W	

## Specifications

### Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

1,2 HP

### Refrigeration System

R449A

### Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

### Air Cooled \*

Minimum clearance: 3" (8 cm) on both side panels and 0" (0 cm) from the rear panel for proper air circulation.

### Hopper Capacity

13 quarts (12,3 liters)

\*\*The single phase air-cooled version is also available with an optional Hopper Agitation feature.

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. \* Room temperature 68 °F (20 °C).

### Bidding Specs

Electrical Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_ Neutral  Yes  No Cooling  Air  Water

Options \_\_\_\_\_



738 Gallimore Dairy Road, Suite 113  
High Point, NC - 27265  
Toll free (800) 648 4389

Dealer



an Ali Group Company



the spirit of excellence