

BAKERLUX SHOP.Pro™ GO

Convection oven designed to efficiently bake frozen goods and pastries



FEATURES

- GO control panel (IPX4)
- Interior LED lighting
- 1-3 Baking steps
- Timer 0 min. to ∞
- Program up to 99 recipes
- Fan shut-off when door is opened

AIR.PLUS


Bi-directional fan(s) guarantee perfect air and heat distribution within the baking chamber for uniform results at every point throughout every tray

DRY.PLUS

Humid air is expelled from the baking chamber to help the internal structure of the product form properly, creating a texture that remains perfect for hours

EFFICIENT.POWER

Best-in-class convection efficiency: 60°C to 260°C (140°F to 500°F) in 5 minutes. Low-e glass lining and high-performance insulation ensure reduced energy consumption

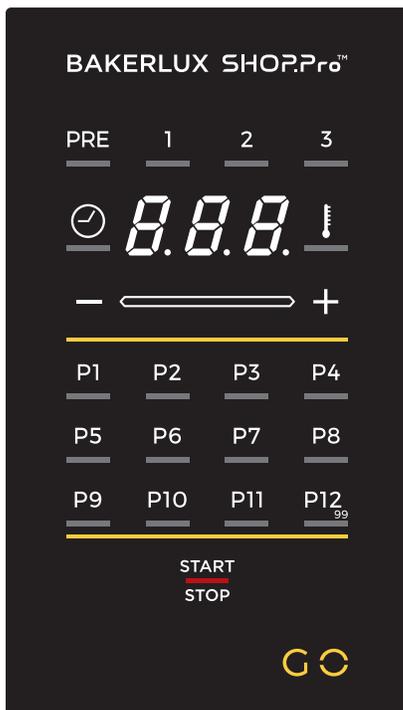


	XAFT-03HS-LGDN
DIMENSIONS	HALF SIZE (13" X 18")
SHELVES*	3
SHELF CLEARANCE	3"
POWER	120V, 1440W, 12A, 5-15P
FANS	1
DOOR SWING	TOP TO BOTTOM
TEMP. RANGE	0 - 260°C 32 - 500°F
CHAMBER DIM.	13.75" L X 19.5" W X 10.25" H
CHAMBER CAP.	1.6 CUFT
EXTERIOR DIM.	28.3" L X 23.6" W X 16.7" H
NET WEIGHT	79.5 LBS
SHIP DIM.	30.7" L X 28.3" W X 23.2" H
SHIP WEIGHT	106 LBS

*Wire shelves included

BAKERLUX SHOP.Pro™ GO

CONSTRUCTION

- Stainless steel housing & cooking chamber
- Double-pane glass door
- Insulated baking cavity for thermal efficiency and user safety

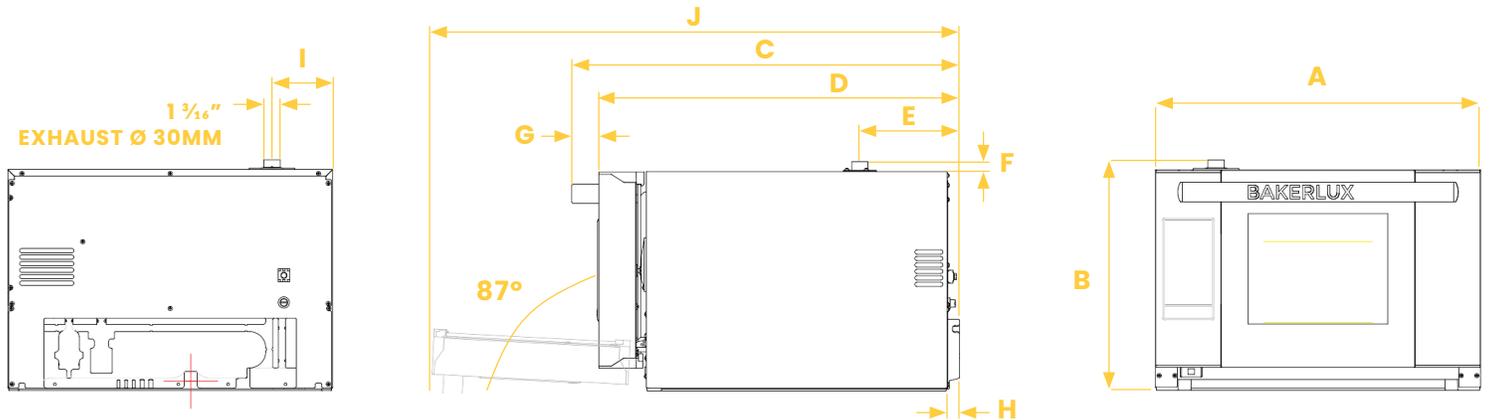

Oven must be min. 2" from the wall on both sides (left and right).

	A	B	C	D	E	F	G	H	I	J
XAFT-03HS-LGDN	23.6"	16.7"	28.3"	26.3"	7.3"	.7"	2.0"	.9"	4.4"	38.5"

ONE YEAR WARRANTY ON PARTS AND LABOR (GLASS DOOR NOT INCLUDED)

