

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.

INNOVATIVE **HIGH EFFICIENCY** COUNTER TOP COOLER. PERFECT FOR **SELF CHECKOUT AREAS**.



➤ KEY FEATURES

• **BMAD Refrigeration System**

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption

• **Electronic Temperature Controller**

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

• **High Efficiency Glass Door**

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

• **LED Lighting System**

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

• **CFC and HFC Free Cyclopentane Foam**


Eco-friendly, recyclable and high efficiency cabinet insulation.

• **Electronic Fan Motors**


Enhances performance and efficiency. Uses only a fraction of the energy than industry standard shaded-pole motor requires. Longer lifespan fan motor.

ESTABLISHING A **NEW STANDARD** IN THE COMMERCIAL REFRIGERATION INDUSTRY.


PRODUCT VIEWS



TOP VIEW

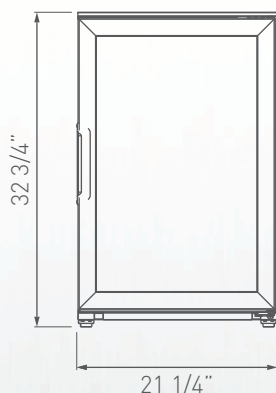

FRONT VIEW

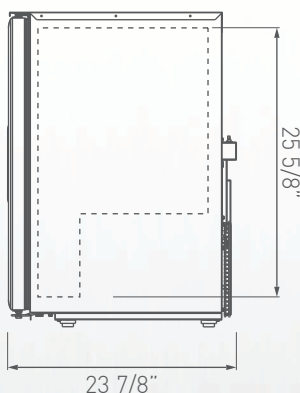

SIDE VIEW

Warranty:

Three year limited warranty on all parts and labor, an additional two year warranty on compressor. (USA and Canada only)

Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.

Customer Service: 866-363-0079 | WWW.IMBERAFOODSERVICE.COM

TECHNICAL SPECIFICATIONS

Exterior Dimensions	W:	21 1/4"	540 mm
	D:	23 7/8"	608 mm
	H:	32 3/4"	830 mm

Interior Dimensions	W:	18"	458 mm
	D:	18 3/4"	476 mm
	H:	28 5/8"	726 mm

Dimensions w/packaging	W:	23 5/8"	600 mm
	D:	25 1/4"	640 mm
	H:	35"	890 mm

Shelf Size	W:	17 3/8"	440 mm
	D:	12 5/8"	320 mm

Weight	114.6 Lbs	52.0 kg
Weight w/packaging	123.5 Lbs	56.0 kg

Shelves	2
----------------	---

Capacity 20oz.	Flat:	60
-----------------------	--------------	----

REFRIGERATION DATA

Energy Consumption	1.454 kWh/day
---------------------------	---------------

Voltage	115/60
----------------	--------

Horse Power	1/10
--------------------	------

AMPS	2.4
-------------	-----

LOGISTIC

Trailer Loads	40':	120
	53':	160

Certifications	UL:	✓
	ES:	✓
	UL/EPH:	✓

* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

BMAD System (Low maintenance high performance).
Dimensions rounded up to the nearest inch or millimeter.
Specifications subject to change without notice.