



G319 HC METALLIC SS VERTICAL COOLER

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES



- **Eco-Friendly Refrigerant**
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.



- **Electronic Temperature Controller**
Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



- **High Power Reliable Refrigeration System**
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.



- **Newly Designed Condenser**
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.




- **Standard LED Lighting System**
Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



- **Spark-Free Refrigeration Components**
All Reach-In models will have spark free refrigeration components for optimal safety, per UL requirements.

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

PRODUCT VIEWS

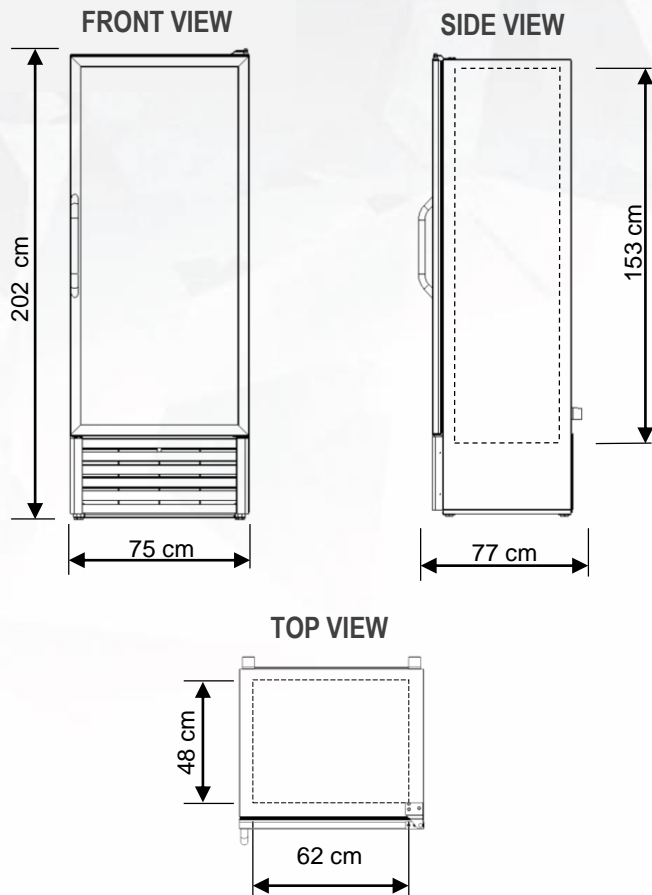

ADDITIONAL FEATURES



> Door frame with polished aluminum finish.

> Aluminum door handle

TECHNICAL SPECIFICATIONS

Exterior Dimensions

H:	79 3/4"	202 cm
W:	29 1/2"	75 cm
D:	30 1/8"	77 cm

Interior Dimensions

H:	60 3/8"	153 cm
W:	25 1/2"	65 cm
D:	21 5/8"	55 cm

Usable Interior Capacity

H:	52 9/10"	134 cm
W:	24 3/10"	62 cm
D:	19 1/10"	48 cm

Usable Volume

19.29 ft ³
546.23 lts

Doors	Door construction	Shelves	Shelves Size
1	Aluminum frame	5	W: 24 4/5" 63 cm D: 19 3/5" 50 cm

External Material	Pre-painted steel
Internal Material	Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant	Energy Consumption	
R290 1.9 Oz (0.055 kg)	1.820 kWh/24h	
Compressor Power	Condenser	
1/4 HP	Finless (low maintenance)	
Thermostat setting default	Cut-Out	Cut-In
	32°F (0°C)	44.6°F (7°C)

ELECTRICAL DATA

Power supply	AMPS	Lighting
115V/60 Hz	7.0 A	300 Lux Output 3 modules 8 LED per module and 32 LED per module
Plug Type	Controller	Cord length
B	EET	118" (3000 mm)

LOGISTIC DATA

Trailer Loads	Unit weight with packaging	Dimensions w/packaging
20': 21	240.5 lb 109 kg without packaging	H: 81 7/8" 208 cm
40': 42		W: 30 5/8" 78 cm
53': 60		D: 31 1/4" 79 cm
	222.6 lb 101 kg	

Customer service and warranty

Three year limited warranty, includes parts and labor.

An additional two year warranty is issued on the compressor (USA & Canada only).

Operators must follow installation and operational guidelines per Imbera Users Manual.

Each cooler must be connected directly to a single power supply, otherwise warranty will be voided.

Customer service: 866.548.5770

*Energy consumption based on ANSI/ASHRAE Standard 72-2005

*BMAD System (Low maintenance high performance)

*Dimensions rounded up to the nearest inch or centimeter

*Specifications subject to change without notice

*H: Height, W: Width, D: Depth

27/04/23