

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: ICT-VSU6PR **SUSHI CASES – Left side condensing unit**

Important: Only display refrigerated product in Sushi Case. It is recommended that Sushi Case is cleaned daily and disconnected.



General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency, LED saves 90% more energy compared to traditional fluorescent bulbs. Considerably increases product visibility.
- ✓ **Control systems.** Higher precision in managing temperature settings. The ability to adjust temperature ranges to meet end user’s requirements.
- ✓ **100% Tested.** All condenser units tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. EQA audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); ISO 45001:2018 (Prevention and Worker Safety)

Revision:01 Date: 29/07/2022 ICT-VSU6PR

MODELS	Dimensions (inches) (mm)			Doors	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (°F) (°C)	Cond. Unit (H.P)	Capacity (Cu.Ft.) (L)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H								
ICT-VSU6PR	64-1/16 (1620)	16-1/8 (410)	9-1/8 (230)	2	R290	0,22 (100)	30 °F/34 °F (-1°C/+1°C)	1/8	0,47 (13,30)	3,4	139 (52)

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: ICT-VSU6PR	SUSHI CASES – Left side condensing unit
--------------------------	--

STANDARD FEATURES

➤ **Exterior**

- AISI 304 Stainless Steel,
- Tilt-forward security tempered glass system,
- Real sliding windows, included,
- Anodized aluminum silver profile,
- Levelling feet.

➤ **Interior**

- AISI 304 Stainless Steel,
- Plastic exhibition tray,
- Internal drain plug for easy cleaning,
- **LED Lighting** in top profile

➤ **Insulation**

- Polyurethane with high density 40kg/m³, CFS free, zero ODP and low GWP.
- Low GWP & Zero ODP effect.

➤ **Refrigeration**

- Digital temperature controller,
- Manual defrost system,
- Gravity coil on top and cold plate refrigeration system on the bottom,
- Refrigeration capacity: 751 Btu/h (14°F) / 220 W (-10°C).

➤ **Electrical**

- Cord and NEMA 5-15P plug,
- Electrical connection is 115V/ 1ph / 60 Hz.



OPTIONAL FEATURES

- ✓ Electrical connections is:
 220 – 230 V / 1 ph / 50Hz (plug type varies).

➤ **ETL Listen to UL471 Standard and Sanitation classified to NSF7.**

Revisión:01 Date: 29/07/2022 ICT-VSU6PR

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División
 11200NW 25th St ste 123, Sweetwater. FL, 33172
 (305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com





Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____


MODEL: ICT-VSU6PR *SUSHI CASES – Left side condensing unit*

PLAN VIEW

ELEVATION **RIGHT VIEW**

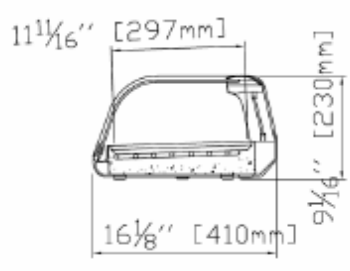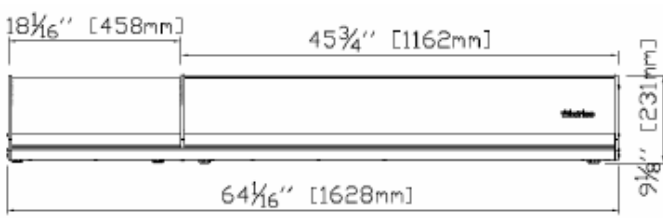

PLAN VIEW

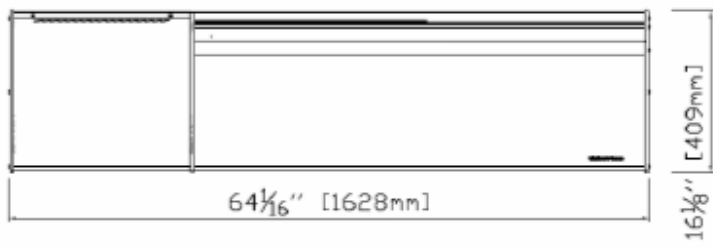

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



INFRICO-North America Corporate División
 11200NW 25th St ste 123, Sweetwater, FL, 33172
 (305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Revision: 01 Date: 29/07/2022 ICT-VSU6PR