




NUMBER	DTI-19608UL
MODEL	VRP
EDITION	0
DATE	02/08/2019
VERSION	00

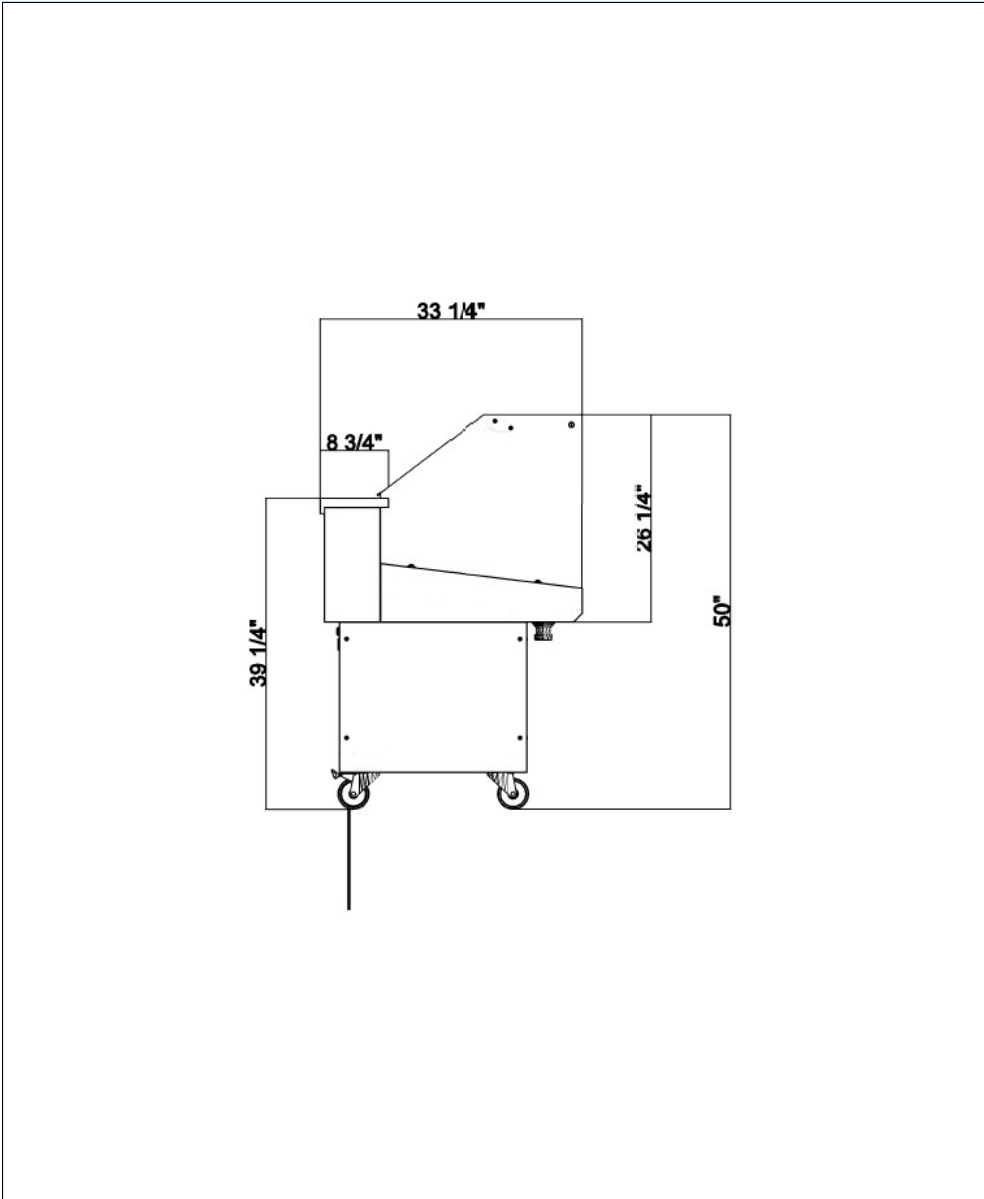

MODEL	
VRP	
MODULES	

Edition : 0 | Date: 02/08/2019

Code : DTI-19608UL

version: 00

In accordance with:
UL471 and NSF7



MERCHANDISING DATA

		MODELS	
		VRP13	
Length (with sides included)	in	52	
	mm	1320	
Refrigerated area	Ft ²	8	
	m ²	0,75	
Useful volume	Ft ³	4	
	Lts	115	
TDA - Total Display Area	Ft ²	6 1/2	
	m ²	0,60	
N° of shelves		-	
Control		DIGITAL	
Weight	Lbs	379	
	Kg	172	
Packaging dimensions	in	56 2/7 x	
		51 4/7 x	
		41 1/3	
	mm	1430 x 1310 x 1050	

Volts / Frequency
115v / 60Hz.

NOISE LEVEL
63dB

REFRIGERANT
R290a

MODEL
VRP

REFRIGERATION DATA - REGULATION AND CONTROL

INTERIOR TEMPERATURE	SET	-1 °C	30 °F
	DIFFERENCIAL	3	
DEFROST TYPE		NATURAL	
N° DEFROST / DAY			
MAXIMUM DEFROST TIME			
END DEFROST TEMPERATURE		0 °C	32 °F
MINIMUM DEFROST TIME			

In accordance with:	UL471 and NSF7
---------------------	----------------

Room Temperature	Relative humidity	Climate class
+ 30 °C 86 °F	55 %	4

TEMPERATURE CLASSIFICATION



	Climate class	4
PRODUCT TEMPERATURE	-1 °C	30,2 °F
MEDIUM PRODUCT TEMPERATURE	0 °C	32 °F
EVAPORATION	STATIC	
CONDENSATION	VENTILATED	
EVAPORATION TRAY	-	

INSTALLATION BASE FURNITURE DATA

		MODEL	
		VRP13	
COMPRESSOR	N°	1	
	W	233	
	A	1,4	
REFRIGERANT		R290a	
	gr	90	
EVAPORATOR FANS	N°	-	
	W	-	
	A	-	
CONDENSER FANS	N°	1	
	W	7,8	
	A	0,07	
ANTI FOG RESISTANCE	W	-	
	A	-	
CANOPY LIGHTING	LED	W	12
		A	0,10
POWER	W	252,8	
	A	1,57	
CONSUMPTION	kWh/24h	3,54	

LEGS, WHEELS, DRAINS, ELECTRIC BOX

MODEL
VRP

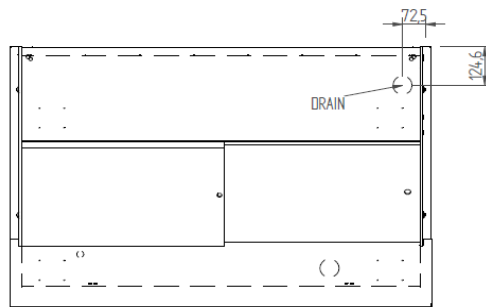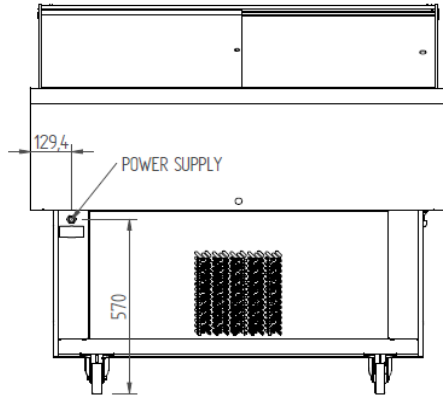

	A		B		C		D	
	in	mm	in	mm	in	mm	in	mm
VVL12	5	129,4	22 4/9	570	2 6/7	72,5	5	124,6