

Refrigeration Equipment Slide Top Mug/Glass Froster Black 36" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738328 (KCHGF36)

Slide Top Mug/Glass Froster
Black 36" Long

Short Form Specification

Item No. _____

36" wide glass/mug/plate froster with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in painted aluminum, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control. Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty

Main Features

- ADA Height Compliant
- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Vinyl-coated steel adjustable dividers to customize storage effortlessly
- Heavy duty vinyl coated steel floor protector shelves
- Cabinet capable of accepting 72 standard 16-ounce pint glasses
- Cabinet capable of accepting 44 standard 16-ounce glass mugs


Construction

- Painted black steel exterior, for durable and sleek modern finish
- Painted white aluminum interior, durable and easy to clean for daily commercial use
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.
- Smooth rolling wheels, for effortless mobility
- Stainless steel worktop, durable functionality

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- 60 mm insulation for energy saving.

APPROVAL: _____

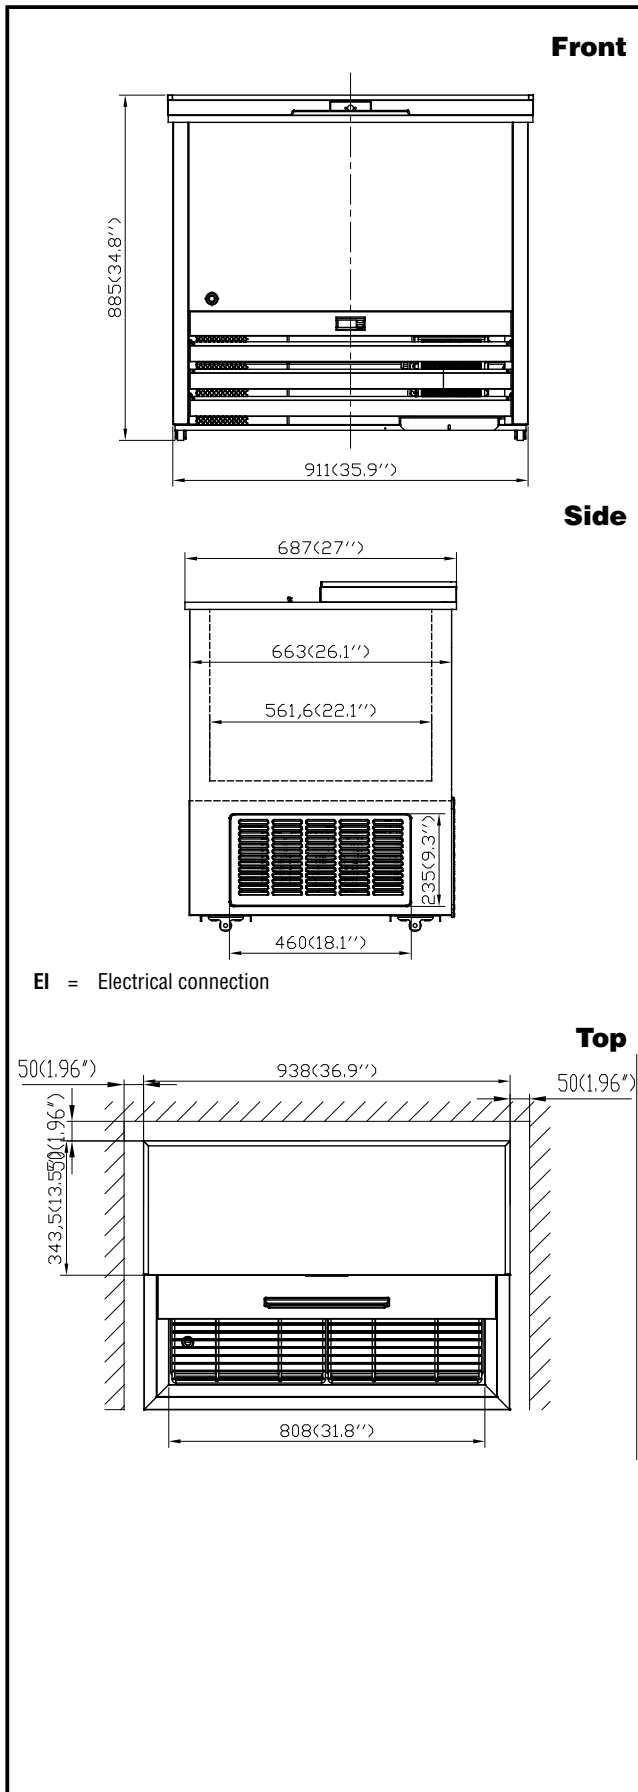

Electric

| | |
|------------------------|------------------|
| Supply voltage: | 115 V/1 ph/60 Hz |
| Electrical power, max: | 0.16 kW |
| Plug type: | NEMA 5-15 |

Capacity:

| | |
|-----------------|--------------|
| Gross capacity: | 5.2 cu. feet |
|-----------------|--------------|

Key Information:

| | |
|-------------------------------|--|
| Warranty: | 3 / 5 years |
| Capacity: | 5.21599 cu.ft. |
| External dimensions, Width: | 36 15/16" (938 mm) |
| External dimensions, Depth: | 27 1/16" (687 mm) |
| External dimensions, Height: | 34 13/16" (885 mm) |
| Number and type of doors: | 1 Full |
| Internal Dimensions (depth): | 14 3/4" / (375 mm) |
| Internal Dimensions (height): | 13 3/4" / (350 mm) |
| Internal Dimensions (width): | 29 11/16" / (754 mm) |
| Shipping height: | 39 3/8" (1000 mm) |
| Shipping weight: | 187 lbs (85 kg) |
| Shipping volume: | 25.35 ft ³ (0.72 m ³) |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | White Prepainted Aluminium |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|-----------------------------|------------|
| Condenser type: | Fin & tube |
| Operating temperature min.: | -5.01 °F |
| Compressor power: | 1/5 hp |
| Operating temperature max.: | -2 °F |
| Defrost type: | Automatic |

Sustainability

| | |
|----------------------|----------|
| Current consumption: | 1.5 Amps |
| Refrigerant type: | R600a |
| GWP Index: | 3 |
| Refrigerant weight: | 100 g |



Refrigeration Equipment
Slide Top Mug/Glass Froster Black 36" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.