



105 Steamboat Drive • Warminster, PA 18974 • (215) 675-9220 • (800) 673-7868
 Email: sales@powersequipmmt.com • Website: powersequipment.com

**REFRIGERATED EQUIPMENT
 MANUFACTURERS**

Project Name: _____	AIA # _____
Location: _____	
Item # _____ Qty: _____	SIS # _____
Model #: _____	

Model: **PCF26SD** **SWING DOOR PHARMA STORAGE COOLER/FREEZER**



STANDARD FEATURES

- Self contained - ready to plug in.
- Heavy duty stainless steel door with handle.
- Custom "Powers Seal" Gasket assures that outside air will not infiltrate the refrigerator unless opened.
- Door lock included.
- Powder-coat exterior finish.
- Digital temperature control allows for control as a freezer or refrigerator
- Data logger included to allow monitoring of temperatures. Allows for a PDF. report output of stored products temperature range.
- Cold wall refrigeration technology allows for consistent temperatures. No fan required.
- Switch controlled vertical LED lamp.
- Adjustable coated wire shelving.
- Balanced refrigeration/freezer systems allows for a temperature range range from -20°C to 3°C(-4°F to 38°F) with a 2 degree differential from set point. (Note: Unit set at 3°C (37.5°F) at factory)
- Stainless steel bottom floor.
- The entire cabinet is foamed in place using a high density, CFC free polyurethane insulation providing excellent efficiency.
- Environmentally safe R290 Refrigerant



Model	Doors	Cabinet Dimensions			Door Size		Shelves	HP	Plug Type	Voltage	Amps	Lights	Crated Weight
		W	D	H	W	H							
PCF26SD	1	26"	22"	56"	24.5"	43.75"	3	1/3	5-15P	115/60/1	7.0	1	210 lbs

PCF26SD

SWING DOOR PHARMA STORAGE COOLER/FREEZER



STANDARD ACCESSORIES
3 Shelves as pictured
7 Day Data logger with PDF report output

OPTIONAL ACCESSORIES
Casters
Full Stainless exterior/interior
Stainless steel shelf trays

STANDARD COLORS
White/Black/Gray/Vanilla




Data Logger
(standard accessory)




Stainless Steel
shelf trays
(optional Accessory)




Model Views

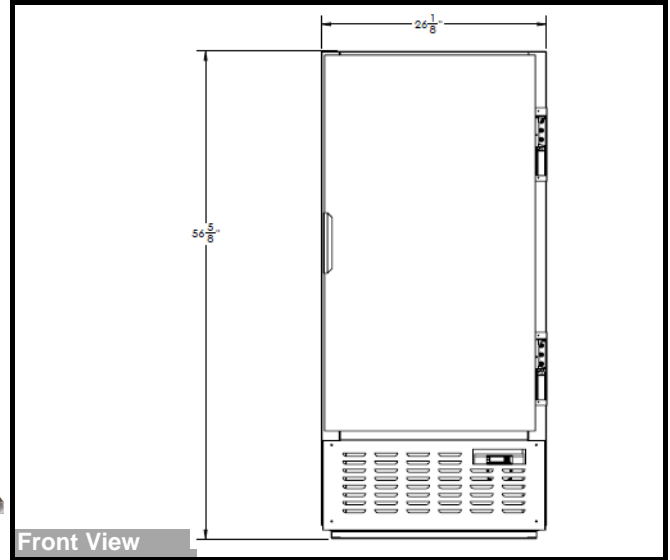

Front View

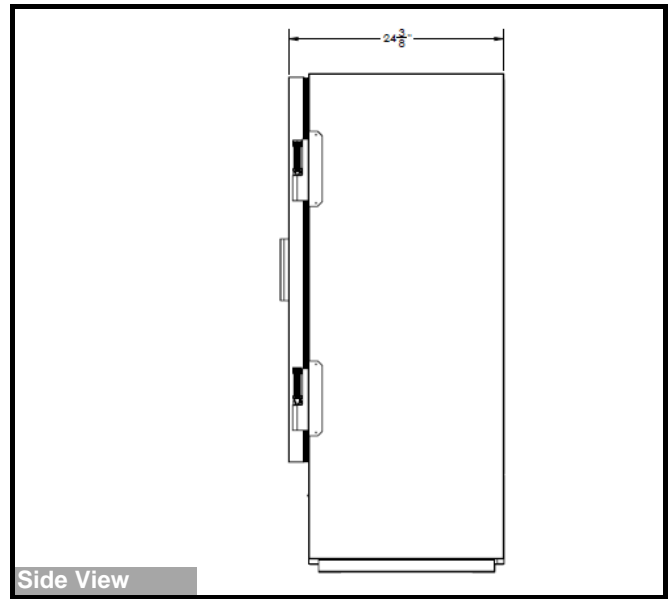

Side View

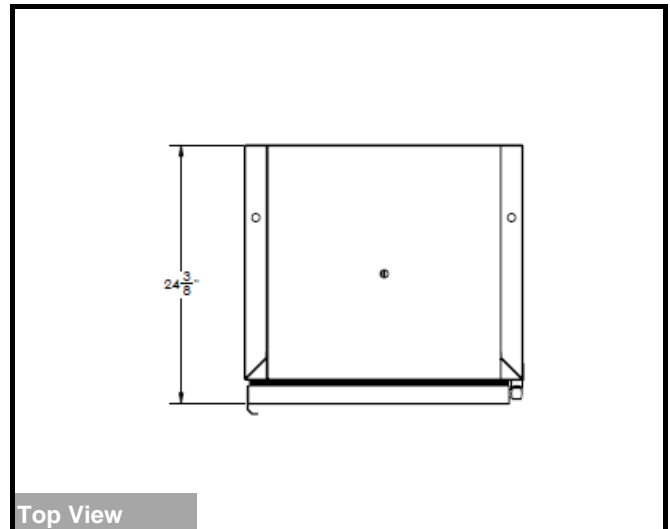

Top View

WARRANTY

One Year Parts and Labor

- The warranty is in effect for one year from date of shipment.
- Factory service authorization must be obtained before any work may be performed under the labor warranty.
- The warranty covers reasonable labor costs, based on straight time, when the unit has been diagnosed as defective.
- This warranty does not cover original installation, initial start-up, normal adjustments, or maintenance.
- OEM parts needed for warranty must be obtained from Powers Equipment.

Five Year Compressor Warranty

Powers warrants to the original purchaser for a period of five years from the date of shipment, that we will replace the compressor on the unit if found, in the reasonable opinion of the factory, to be defective in material or workmanship. Relays, overloads, capacitors, and any other electrical components are not included in the five-year compressor warranty.

ELECTRICAL REQUIREMENTS

- Cooler is pre-wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet.



115/60/1
NEMA-5-15R