



SHIPPING / RECEIVING SCALE

EQM SERIES



Models:

EQM-200/400
EQM-400/800
EQM-1000/2000

Product features

- ✓ Available in 400,800 and 2000 lb capacities
- ✓ LED display with backlight
- ✓ Heavy duty platform
- ✓ Robust carbon steel construction
- ✓ 100 Hours rechargeable battery
- ✓ Toggles between kilograms and pounds
- ✓ Tare function
- ✓ RS 232 serial communication

Product highlights



Robust steel construction



Large solid plate



Heavy dutywheels

Certifications



Warranty






SHIPPING / RECEIVING SCALE

EQM SERIES

Dimensions

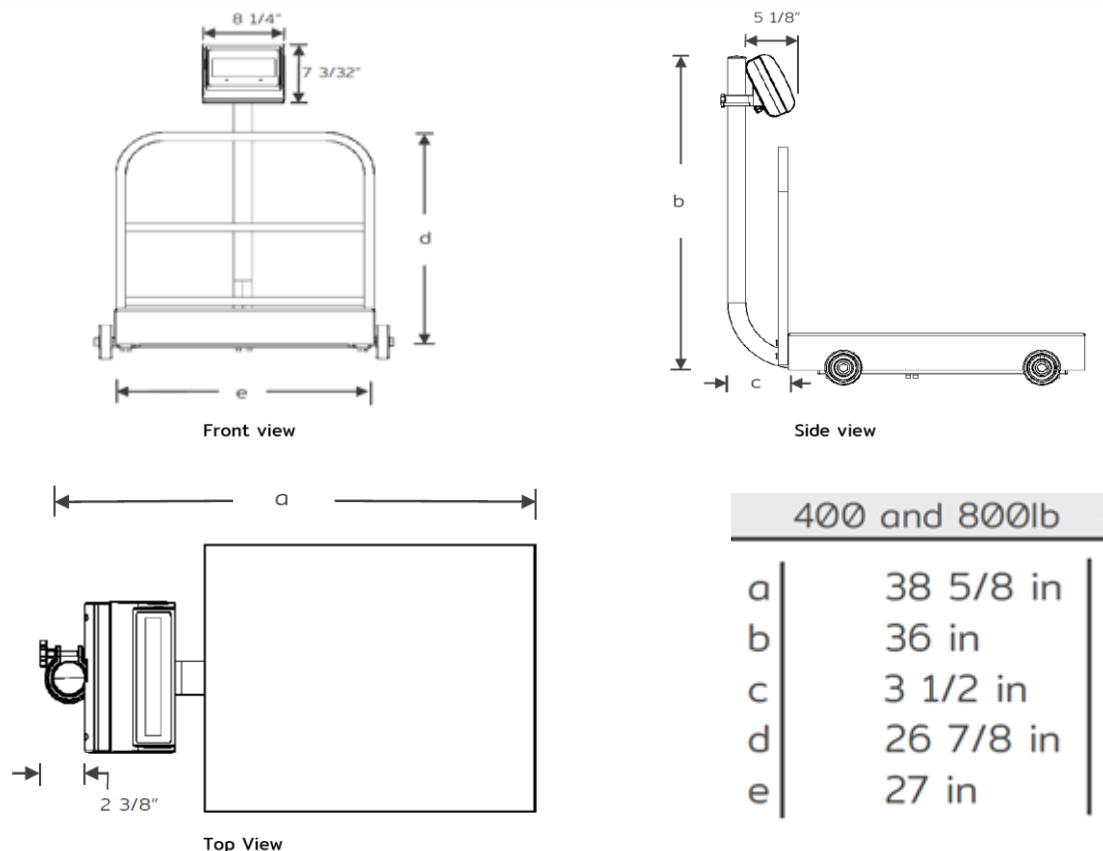

Technical specifications

Dimensions EQM-400/800

External dimensions EQM 400 & 800 lb	W: 38.62" D:32.2" H: 36.00"
Packing dimensions EQM 400 & 800 lb	W: 37.40" D:33.07" H: 8.26"
Net weight EQM 400 & 800 lb	141.0 lb
Total weight EQM 400 & 800 lb	178.5 lb
Plate dimensions EQM 400 & 800 lb	W: 31.07" D: 27.00" H: 4.25 "

Construction

Cabinet material	Carbon steel construction
Transporting wheels	4 duty wheels

Logistic data

Units per pallet	5
Weight per pallet	892.5 lb
Dim. Per pallet	44.88" x 48.03" x 55.11"
Storage temperature	-4°F to 122°F (-20°C to 50°C)

Electrical data

Power supply	100-240 Vca / 47/63 Hz
Input Current	0.2 A
Cord length	47.24 "
Lighting	LED
Plug type	NEMA-5-15P
Display	LCD display with backlight

Performance data

Capacity	400.00 & 800.00 lb
Minimal division	0.1 & 0.2 lb
Max. Tare	400.00 & 800.00 lb

Additional data


Operation temperature	14°F to 104°F (-10°C to 40°C)
Communication	Serial RS-232
Software PC available	Software scale



SHIPPING / RECEIVING SCALE

EQM SERIES

Dimensions

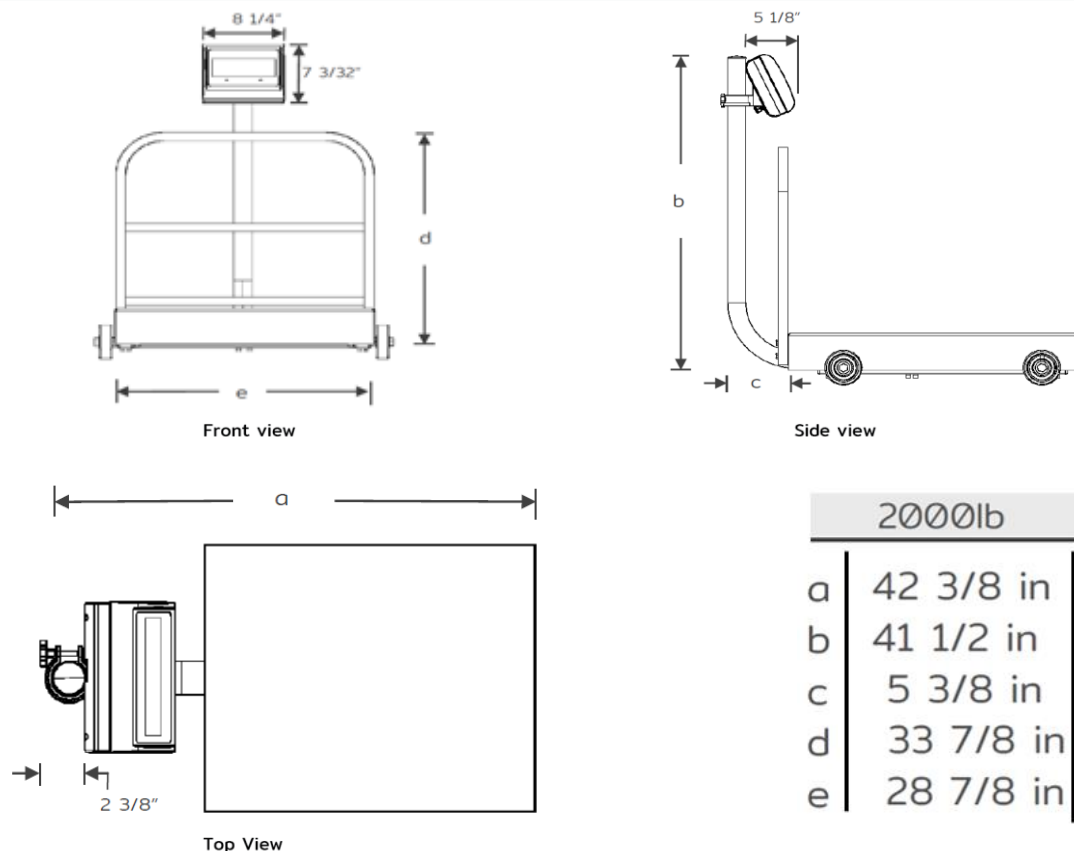

Technical specifications

Dimensions EQM-2000

External dimensions EQM 2000 lb	W: 42.37" D:32.22" H: 45.80"
Packging dimensions EQM 2000 lb	W: 38.18" D:41.73" H: 22.04"
Net weight EQM 2000 lb	196.00 lb
Total weight EQM 2000 lb	233.69 lb
Plate dimensions EQM 2000 lb	W: 29.00" D: 44.00" H: 5.65 "

Construction

Cabinet material	Carbon steel construction
Transporting wheels	4 duty wheels

Logistic data

Units per pallet	5
Weight per pallet	N/A
Dim. Per pallet	N/A
Storage temperature	-4°F to 122°F (-20°C to 50°C)

Electrical data

Power supply	100-240 Vca / 47/63 Hz
Input Current	0.2 A
Cord length	47.24 "
Lighting	LED
Plug type	NEMA-5-15P
Display	LCD display with backlight

Performance data

Capacity	2000.00 lb
Minimal division	0.05 lb
Max. Tare	2000.00 lb

Additional data

Operation temperature	14°F to 104°F (-10°C to 40°C)
Communication	Serial RS-232
Software PC available	Software scale