


Rosko

RO-WS

Green Epoxy Wire Shelving

<input type="checkbox"/> RO-WS-S2414-GE	<input type="checkbox"/> RO-WS-S3614-GE	<input type="checkbox"/> RO-WS-S4814-GE	<input type="checkbox"/> RO-WS-S7214-GE	<input type="checkbox"/> RO-WS-P54-GE
<input type="checkbox"/> RO-WS-S2418-GE	<input type="checkbox"/> RO-WS-S3618-GE	<input type="checkbox"/> RO-WS-S4818-GE	<input type="checkbox"/> RO-WS-S7218-GE	<input type="checkbox"/> RO-WS-P64-GE
<input type="checkbox"/> RO-WS-S2424-GE	<input type="checkbox"/> RO-WS-S3624-GE	<input type="checkbox"/> RO-WS-S4824-GE	<input type="checkbox"/> RO-WS-S7224-GE	<input type="checkbox"/> RO-WS-P72-GE
<input type="checkbox"/> RO-WS-S3014-GE	<input type="checkbox"/> RO-WS-S4214-GE	<input type="checkbox"/> RO-WS-S6014-GE		<input type="checkbox"/> RO-WS-P86-GE
<input type="checkbox"/> RO-WS-S3018-GE	<input type="checkbox"/> RO-WS-S4218-GE	<input type="checkbox"/> RO-WS-S6018-GE		
<input type="checkbox"/> RO-WS-S3024-GE	<input type="checkbox"/> RO-WS-S4224-GE	<input type="checkbox"/> RO-WS-S6024-GE		

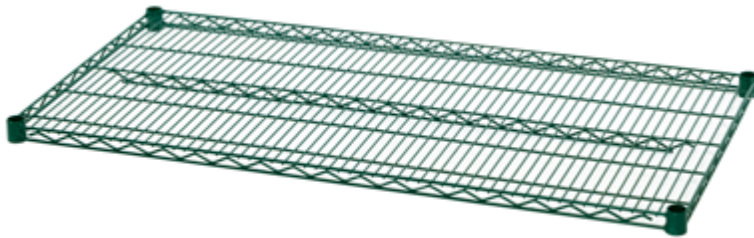

RO-WS-S4824-GE

Features

- Made of steel with durable green epoxy finish
- Posts and shelves sold separately (sold in packs of 4 units)
- Three (3) shelf depths available
- Posts with steel leveling foot
- Posts height identification
- Mounting clips included
- Quick and easy to assemble
- One (1) year limited warranty on parts and labor
- Certified to NSF/ANSI 2 standards

Option



- RO-ACC-WS-CAST5 – 5" Caster w/o Break for Wire Shelving
- RO-ACC-WS-CAST5B – 5" Caster w/ Break for Wire Shelving
- RO-ACC-WS-FOOT – Levelling Foot for Wire Shelving
- RO-ACC-WS-HOOK-GE – Green Epoxy Hook for Wire Shelving
- RO-ACC-WS-4CLIP – Set of 4 Clips for Wire Shelving



955 Lachance Street
 Québec, QC G1P 2H3
 Canada

1 800 461-3377
 roskequipment.ca

*Due to the continuous development of the product,
 specifications are subject to change without notice.*

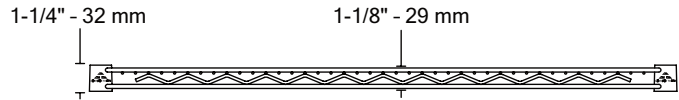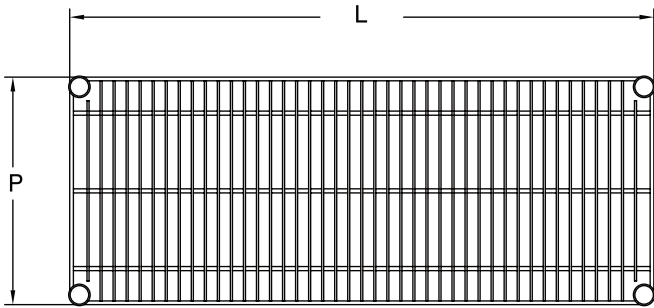

Shelf model	Width (W)	Depth (D)	Height	Packaging		
				Weight	Dimensions (W x D x H)	Quantity
RO-WS-S2414-GE	24" – 610 mm	14" – 356 mm	1 1/4" – 32 mm	35 lb – 16 kg	24 1/2 x 14 1/2 x 7" – 622 x 368 x 178 mm	4
RO-WS-S2418-GE		18" – 457 mm		39 lb – 18 kg	24 1/2 x 18 1/2 x 7" – 622 x 470 x 178 mm	4
RO-WS-S2424-GE		24" – 610 mm		44 lb – 20 kg	24 1/2 x 24 1/2 x 7" – 622 x 622 x 178 mm	4
RO-WS-S3014-GE	30" – 762 mm	14" – 356 mm		41 lb – 19 kg	30 1/2 x 14 1/2 x 7" – 775 x 368 x 178 mm	4
RO-WS-S3018-GE		18" – 457 mm		45 lb – 20 kg	30 1/2 x 18 1/2 x 7" – 775 x 470 x 178 mm	4
RO-WS-S3024-GE		24" – 610 mm		51 lb – 23 kg	30 1/2 x 24 1/2 x 7" – 775 x 622 x 178 mm	4
RO-WS-S3614-GE	36" – 914 mm	14" – 356 mm		47 lb – 21 kg	36 1/2 x 14 1/2 x 7" – 927 x 368 x 178 mm	4
RO-WS-S3618-GE		18" – 457 mm		51 lb – 23 kg	36 1/2 x 18 1/2 x 7" – 927 x 470 x 178 mm	4
RO-WS-S3624-GE		24" – 610 mm		58 lb – 26 kg	36 1/2 x 24 1/2 x 7" – 927 x 622 x 178 mm	4
RO-WS-S4214-GE	42" – 1067 mm	14" – 356 mm		52 lb – 23 kg	42 1/2 x 14 1/2 x 7" – 1080 x 368 x 178 mm	4
RO-WS-S4218-GE		18" – 457 mm		56 lb – 25 kg	42 1/2 x 18 1/2 x 7" – 1080 x 470 x 178 mm	4
RO-WS-S4224-GE		24" – 610 mm		64 lb – 29 kg	42 1/2 x 24 1/2 x 7" – 1080 x 622 x 178 mm	4
RO-WS-S4814-GE	48" – 1219 mm	14" – 356 mm		58 lb – 26 kg	48 1/2 x 14 1/2 x 7" – 1232 x 368 x 178 mm	4
RO-WS-S4818-GE		18" – 457 mm		64 lb – 29 kg	48 1/2 x 18 1/2 x 7" – 1232 x 470 x 178 mm	4
RO-WS-S4824-GE		24" – 610 mm		72 lb – 33 kg	48 1/2 x 24 1/2 x 7" – 1232 x 622 x 178 mm	4
RO-WS-S6014-GE	60" – 1524 mm	14" – 356 mm		37 lb – 17 kg	60 1/2 x 14 1/2 x 4" – 1537 x 368 x 102 mm	2
RO-WS-S6018-GE		18" – 457 mm	40 lb – 18 kg	60 1/2 x 18 1/2 x 4" – 1537 x 470 x 102 mm	2	
RO-WS-S6024-GE		24" – 610 mm	46 lb – 21 kg	60 1/2 x 24 1/2 x 4" – 1537 x 622 x 102 mm	2	
RO-WS-S7214-GE	72" – 1829 mm	14" – 356 mm	44 lb – 20 kg	72 1/2 x 14 1/2 x 4" – 1842 x 368 x 102 mm	2	
RO-WS-S7218-GE		18" – 457 mm	48 lb – 21 kg	72 1/2 x 18 1/2 x 4" – 1842 x 470 x 102 mm	2	
RO-WS-S7224-GE		24" – 610 mm	54 lb – 24 kg	72 1/2 x 24 1/2 x 4" – 1842 x 622 x 102 mm	2	

Post model	Diameter	Height	Packaging		
			Weight	Dimensions (W x D x H)	Quantity
RO-WS-P54-GE	1" – 25 mm	54" – 1372 mm	12 lb – 5 kg	4 1/2 x 1 1/2 x 54" – 114 x 38 x 1372 mm	4
RO-WS-P64-GE		64" – 1626 mm	15 lb – 7 kg	4 1/2 x 1 1/2 x 64" – 114 x 38 x 1626 mm	4
RO-WS-P72-GE		72" – 1829 mm	17 lb – 8 kg	4 1/2 x 1 1/2 x 72" – 114 x 38 x 1880 mm	4
RO-WS-P86-GE		86" – 2184 mm	20 lb – 9 kg	4 1/2 x 1 1/2 x 86" – 114 x 38 x 2184 mm	4