


SCH 65

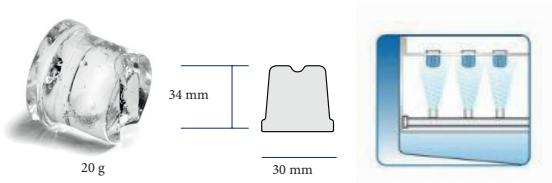

127 lb Self-contained Ice Machine

Technical features											
• Stainless steel bodywork • Vertical pump • Main switch (ON/OFF) • Built-in cleaning system • Easily accessible components • Low power and water consumption • Optimum ratio between ice production and bin capacity • Reduced dimensions • Electronic PCB to create perfect cubes and help troubleshooting with alarm signals • Scale tap • Adjustable feeds • Bin sensor termic • Easy clean spray system • R290 condenser											
Internal bin capacity		Type of ice									
 48.5 lb of ice 1100 cubes		Full Cubes 									
Voltage		Machine dimensions									
115/60/1 Standard version		<table><tr><td>Exterior dimensions</td><td>18.2x22.4x35.3 in</td></tr><tr><td>WxDxH Product Weight</td><td>86.0 lb</td></tr><tr><td>Shipping Dimensions</td><td>21.3x25.2x35.4 in</td></tr><tr><td>Shipping Weight (approx.)</td><td>99.2 lb</td></tr></table>		Exterior dimensions	18.2x22.4x35.3 in	WxDxH Product Weight	86.0 lb	Shipping Dimensions	21.3x25.2x35.4 in	Shipping Weight (approx.)	99.2 lb
Exterior dimensions	18.2x22.4x35.3 in										
WxDxH Product Weight	86.0 lb										
Shipping Dimensions	21.3x25.2x35.4 in										
Shipping Weight (approx.)	99.2 lb										
Technology and Certifications		FOOD SERVICE SOLUTIONS INC. 2-6599 Kitimat Road Mississauga, ON L5N 4J4 (800) 668-8765 e-mail: info@myfss.ca  									

SCH 65



127 lb Self-contained Ice Machine

Accessories

- Scoop
- Hose set tubes
- Drain tube
- Legs
- Floor mount kit to be provided with the unit to be ordered as accessory (SCKITFLOOR5CH50)

Warranty


- 3 years parts and labor costs
- 5 years warranty on compressor



SCH 65



127 lb Self-contained Ice Machine

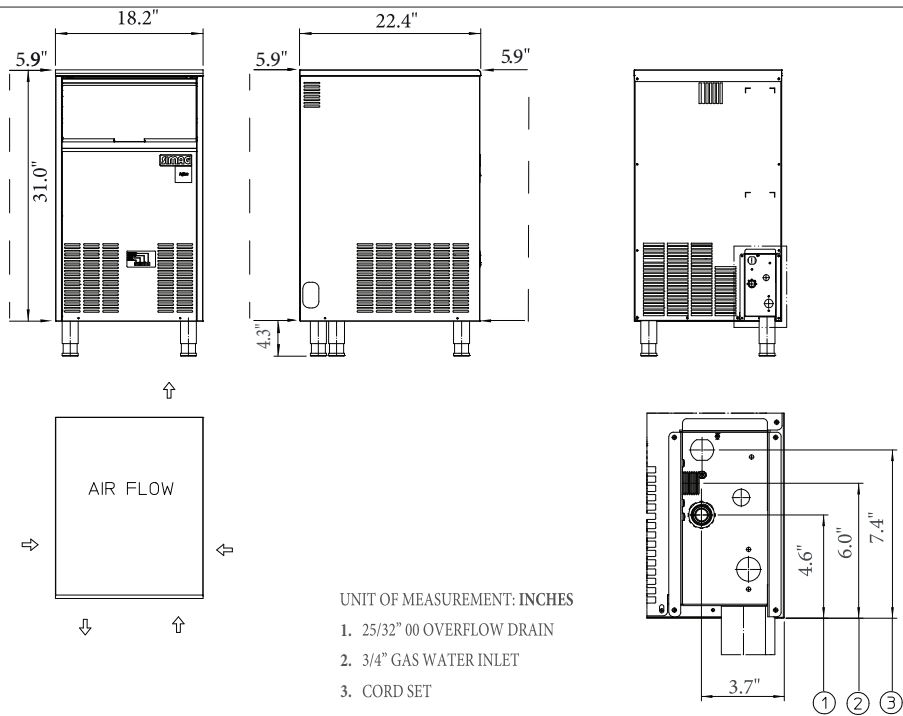

- UNIT OF MEASUREMENT: INCHES
- 1. 25/32" 00 OVERFLOW DRAIN
 - 2. 3/4" GAS WATER INLET
 - 3. CORD SET

DRAINAGE PER GRAVITY

Recommended breaker size: 15 amp
plug type: nema 5-15 p

Operating Limits

	Minimum	Maximum
Ambient temperature	50°F (10°C)	100°F (38°C)
Water temperature	40°F (5°C)	100°F (38°C)
Water pressure	1 bar (14 PSI)	5 bar (70 PSI)
Clearance (right and left)	6 in (15 cm)	-

Specifications and design are subject to change without notice
Note: if clearance is less, ice production will decrease up to 20/25%

Model	Voltage	Daily production lb		Daily production kg		Power input Watt (*)	Refrigerant	Fuse A	Consumptions (**)			
		21/10°C 70/50°F	32/21°C 90/70°F	21/10°C 70/50°F	32/21°C 90/70°F				kJ/kg	kWh/100lb	l/kg	Water gal/100lb
SCH 65 A	115/60/1	127	101	57.5	127	560	R290	10	755	9.51	2.9	35
(*) Power Input: at 90°F Ambient Temperature												
(**) Water Consumption: at 90°F Air and 70°F Water												