



Item No. \_\_\_\_\_

C161

# C161

## Soft Serve Freezer

Compact Twin Twist

R290 Refrigerant

### Features

Offer all the popular soft serve variations, from low or non-fat ice creams to custard, yogurt, and sorbet. Serve two separate soft serve flavors or an equal combination of both in a twist.

### Freezing Cylinder

Two, 1.5 quart (1.4 liter).

### Mix Hopper

Two, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

### Indicator Lights

The Mix Low light alerts the operator to add mix. Audible alarm may be enabled to sound when mix is low.

### Electronic Controls

Finished product quality is monitored by Softech™ controls that measure viscosity.

### Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

### Air Filter

Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.

### Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.



Optional Cart with Front Opening Door

750 N. Blackhawk Blvd. Rockton, Illinois 61072  
**800-255-0626**  
Phone 815-624-8333 Fax 815-624-8000  
**www.taylor-company.com**  
info@taylor-company.com

ISO 9001:2015  
Registered Firm




Standard 6



Selected 50/60  
Hz. Models



**LISTED**  
SA2650

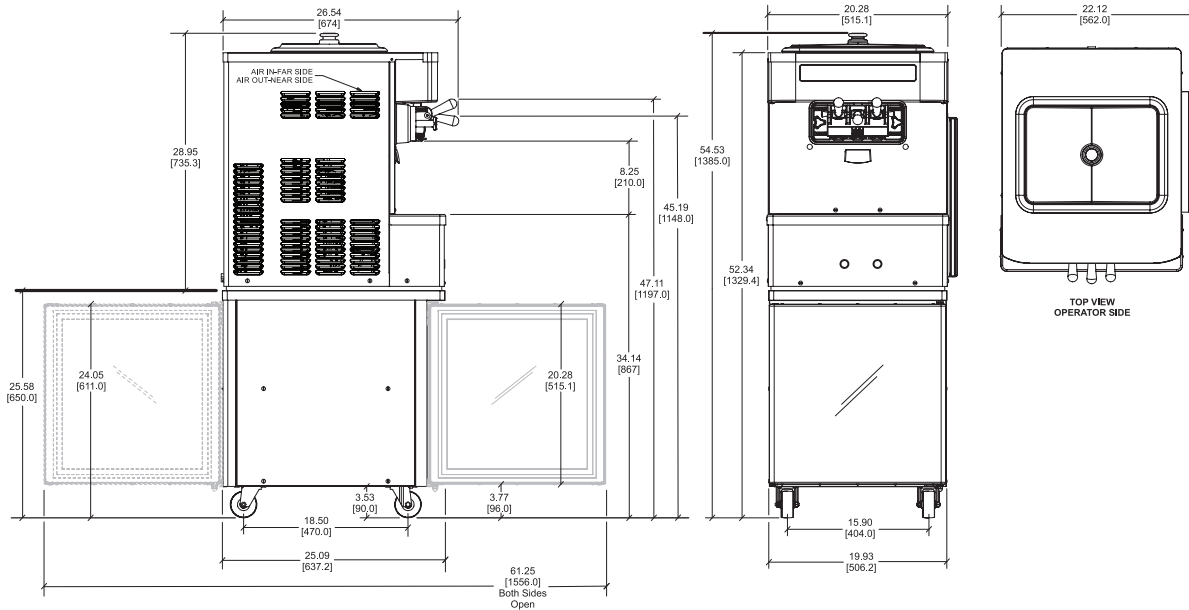

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO ( PLUS OR MINUS 1/16 INCH [1.5mm]). DRAWING IS TO BE USED FOR REFERENCE ONLY - DO NOT USE FOR STORE CONSTRUCTION LAYOUT.

Weights	lbs.	kgs.
Net	277	126.0
Crated	309	140.0
<i>*For reference only</i>		
Volume	cu. ft.	cu. m.
Volume	22.3	0.63
Dimensions	in.	mm.
Width	22-1/8	562
Depth	25-1/8	638
Height	29	737
<i>*Mounted on standard casters</i>		
Electrical	Total Amps	Poles(P) Wires(W)
220-240/50/1 Air	10	----

## Specifications

### Electrical

One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be cord-connected. Consult the international Taylor distributor for cord and receptacle specifications for 50 Hz equipment.

### Beater Motor

Two, 0.5 HP.

### Refrigeration System

Main system, one, 4,200 BTU/Hr using R290.  
Separate Hopper Refrigeration (SHR), one, 400 BTU/Hr R290.  
(BTUs may vary based on application.)

### Air-Cooled

Minimum Clearance: 6" (152 mm) on left and right, and 0" in the rear.  
Minimum air clearances must be met to ensure adequate airflow for optimum performance.

## Options

- Cone Dispenser
- Legs - [increase height of unit by 4-1/4" (108 mm)]
- C207 Cart Standard Height with Casters

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements. **(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)**

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**

### Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral: Yes No Cooling: Air Water NA

Options: \_\_\_\_\_

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor



750 N. Blackhawk Blvd.  
Rockton, Illinois 61072  
[www.taylor-company.com](http://www.taylor-company.com)