



Item No. _____

PH61

Shake Freezer

Four Flavor, Pump



Features

Offer four separate shake flavors: chocolate, vanilla, strawberry and an optional flavor. Portion controlled shake dispensing for high volume milkshake production.

Heat Treatment System

Provides a daily heating and cooling cycle to safely maintain dairy products up to two weeks before a complete disassembly and cleaning is required.

Freezing Cylinder

One, 7 quart (6.6 liter).

Mix Hopper

One, 20 quart (18.9 liter). Refrigerated to maintain mix below 41°F (5°C).

Indicator Lights

Mix Low light flashes to alert the operator to add mix. When the Mix Out light flashes, the refrigeration system automatically goes into Standby mode to prevent damage.

Electronic Controls

Viscosity is continually measured to serve consistent quality shakes. The LCD (Liquid Crystal Display) readout will identify temperatures in the hopper and freezing cylinder at any point of operation. History of temperatures and times during the last 13 heat cycles may be viewed.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Syrup System

Shake flavors are selected from touch pads. Self-contained air compressor delivers shake syrup from four, 1 gallon (3.8 l) syrup tanks located in the lower front compartment. Frozen shake mix and syrup automatically blends to dispense the chosen flavor. Use only single strength syrup, free from pulp and seeds.

Two Locking Casters

Front casters have a locking feature for operators to lock to maintain equipment in place. The locking casters can be released to move the equipment for cleaning.




Simplified Pump

Approval Mark Note:

The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.

750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com



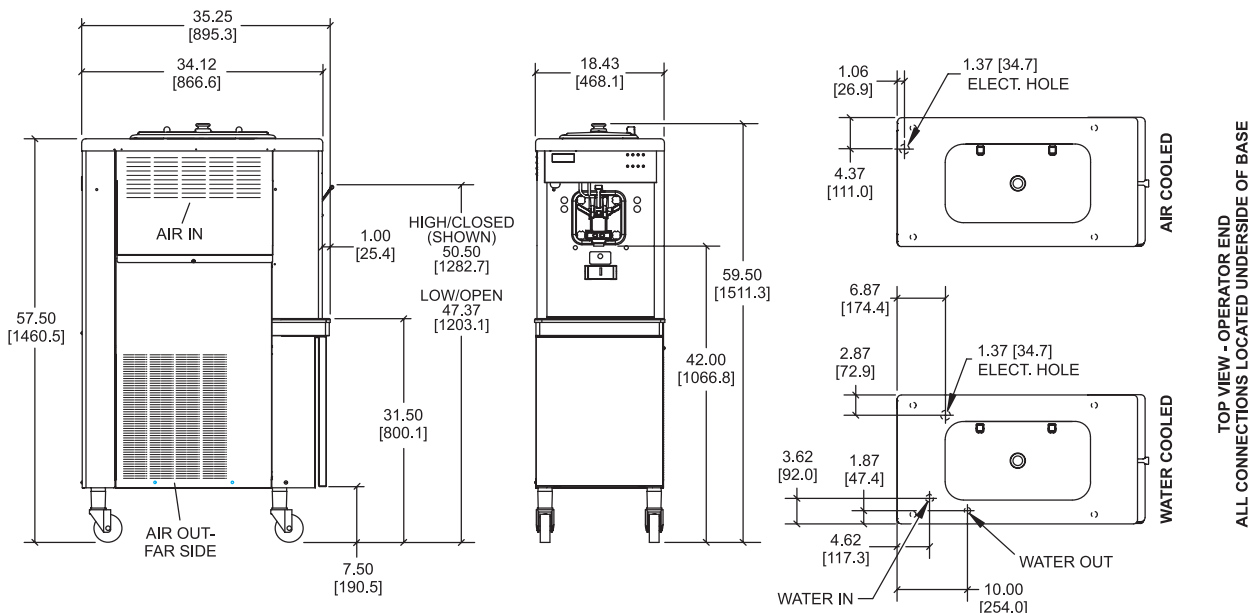

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

TOP VIEW - OPERATOR END
ALL CONNECTIONS LOCATED UNDERSIDE OF BASE

| Weights | lbs. | kgs. |
|-----------------|---------|--------|
| Net | 608 | 275.8 |
| Crated | 650 | 294.8 |
| Volume | cu. ft. | cu. m. |
| | 66.5 | 1.88 |
| Dimensions | in. | mm. |
| Width | 18-7/16 | 468 |
| Depth | 35-1/4 | 895 |
| Height | 59-1/2 | 1511 |
| Floor Clearance | 7-1/2 | 191 |

*Mounted on standard casters

| Electrical | Maximum | Minimum | Poles (P) Wires (W) |
|--------------------|-----------|------------------|------------------------|
| | Fuse Size | Circuit Ampacity | |
| 208-230/60/3 Air | 25 | 18 | 3P 4W |
| 208-230/60/3 Water | 25 | 18 | 3P 4W |
| 380-415/50/3N~ Air | 20 | 20 | 4P 5W |

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

One, 1.0 HP.

Refrigeration System

One, 11,000 BTU/hr. R404A.
(BTUs may vary depending on compressor used.)

Air Cooled

Minimum 3" (76 mm) around all sides. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Water Cooled

Water inlet and drain connections under side of base 3/8" FPT.

Options

- Faucet
- Hopper Locks
- Shake Cup Dispenser

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor Distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information and approval marks, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: Yes No Cooling: Air Water NA

Options: _____

Authorized Taylor Distributor



750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com