

Snooker®



SK-129S & SK-89S

UNDERCOUNTER CUBE ICE MACHINE



Features

- ETL/ETLS Certification
- R290 Refrigerant
- Stainless steel exterior
- Automatic fault alert system
- Efficient ice production
- Front air discharge for compact spaces
- Digital control panel with ice thickness adjust function
- Premium water filter included



Standard Warranty

- 3 year parts, labour & compressor warranty

Operating Requirements

Minimum Maximum

Ambient Air Temperature

5 °C (41 °F) 40 °C (104 °F)

Water Temperature

5 °C (41 °F) 35 °C (95 °F)


Ice Forms




Half Cube (mm)
22 x 13 x 22

Model	Condensing Unit	Refr igerant Gas	Ice Production per 24 hrs		
			50°F air/ 50°F water	70°F air/ 50°F water	90°F air/ 70°F water
SK-129S	Air Cooled	R290	134 lbs	120 lbs	108 lbs
SK-89s	Air Cooled	R290	94 lbs	88 lbs	79 lbs

SK-129S - Line Drawings

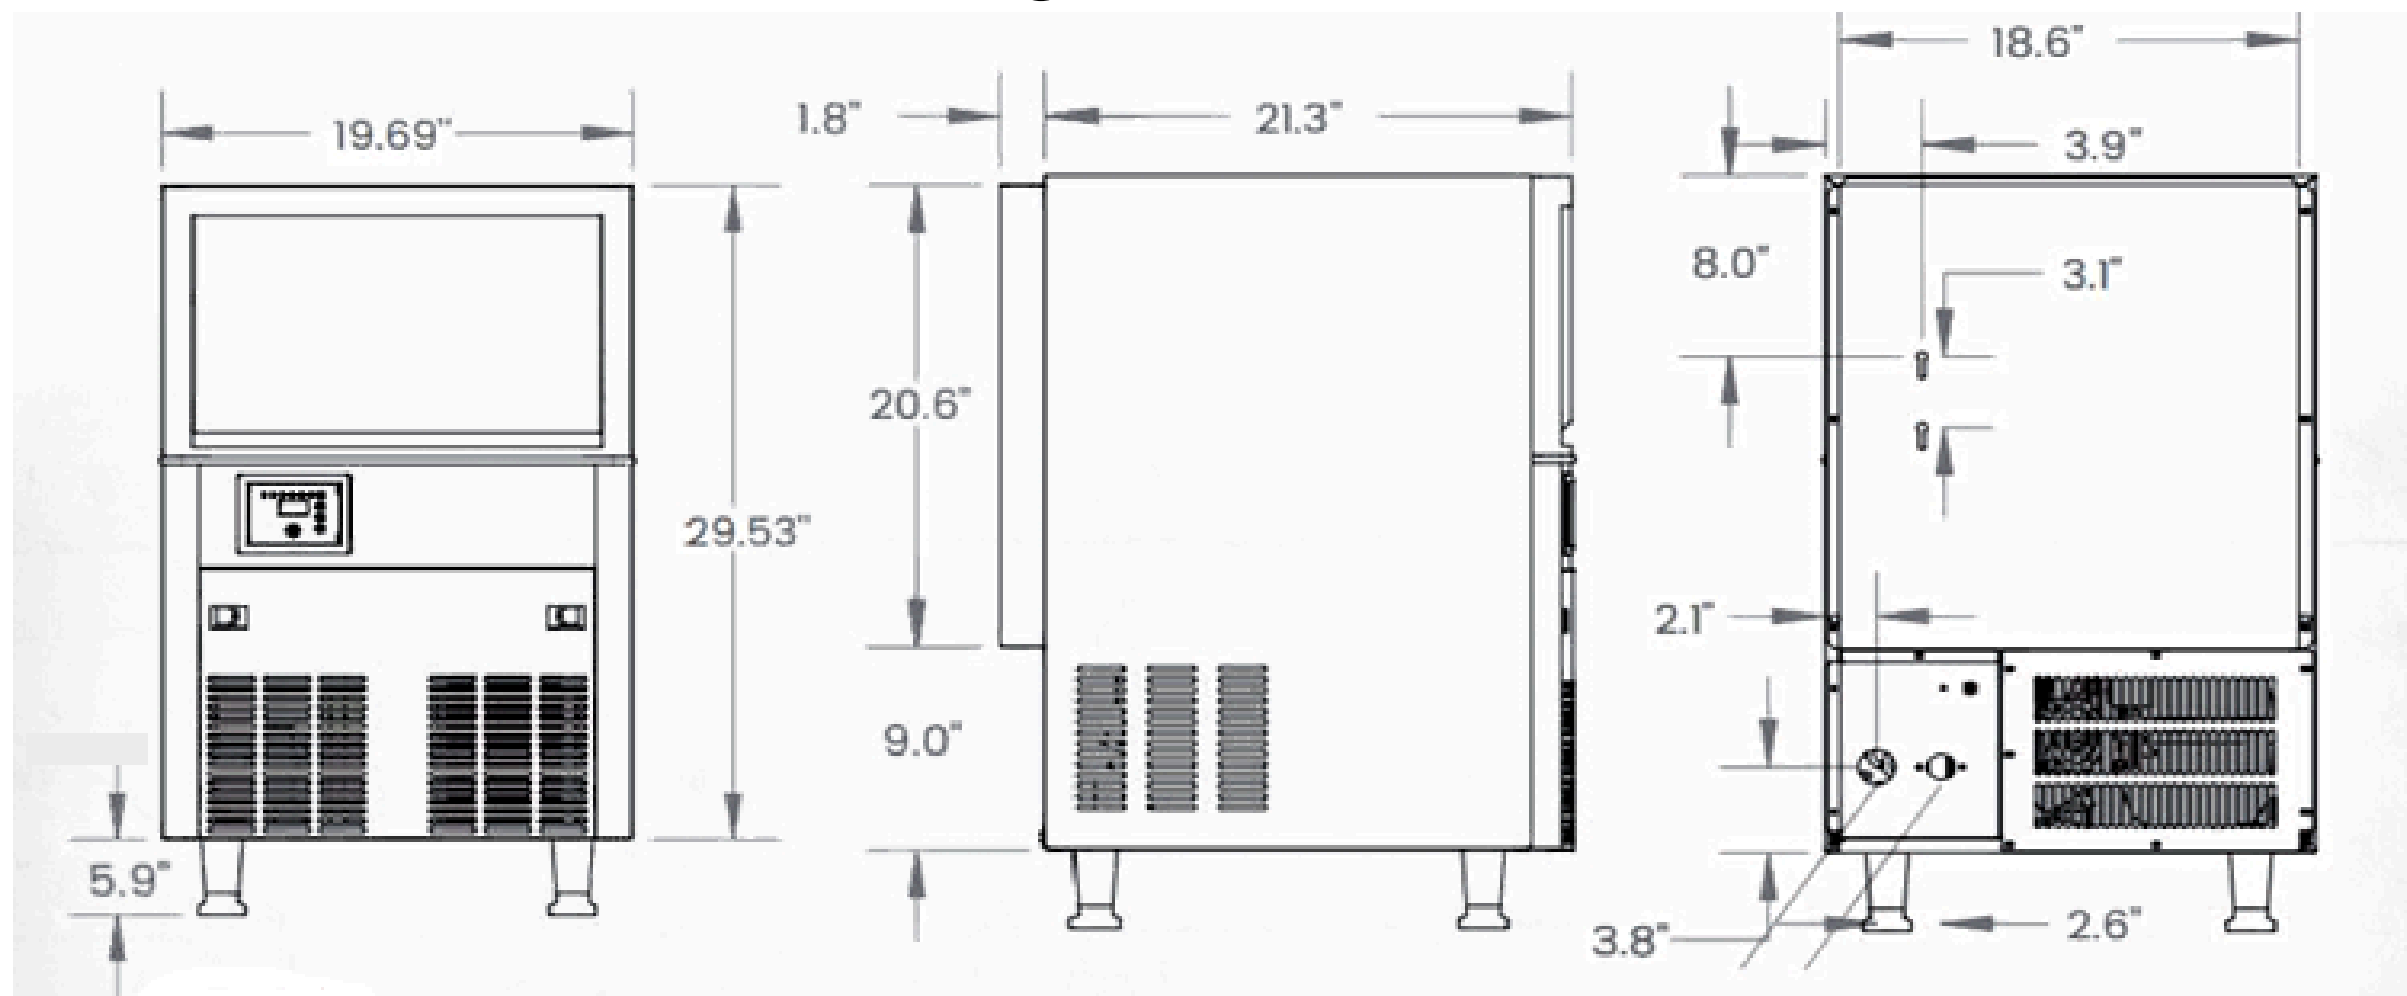

SK-89S - Line Drawings

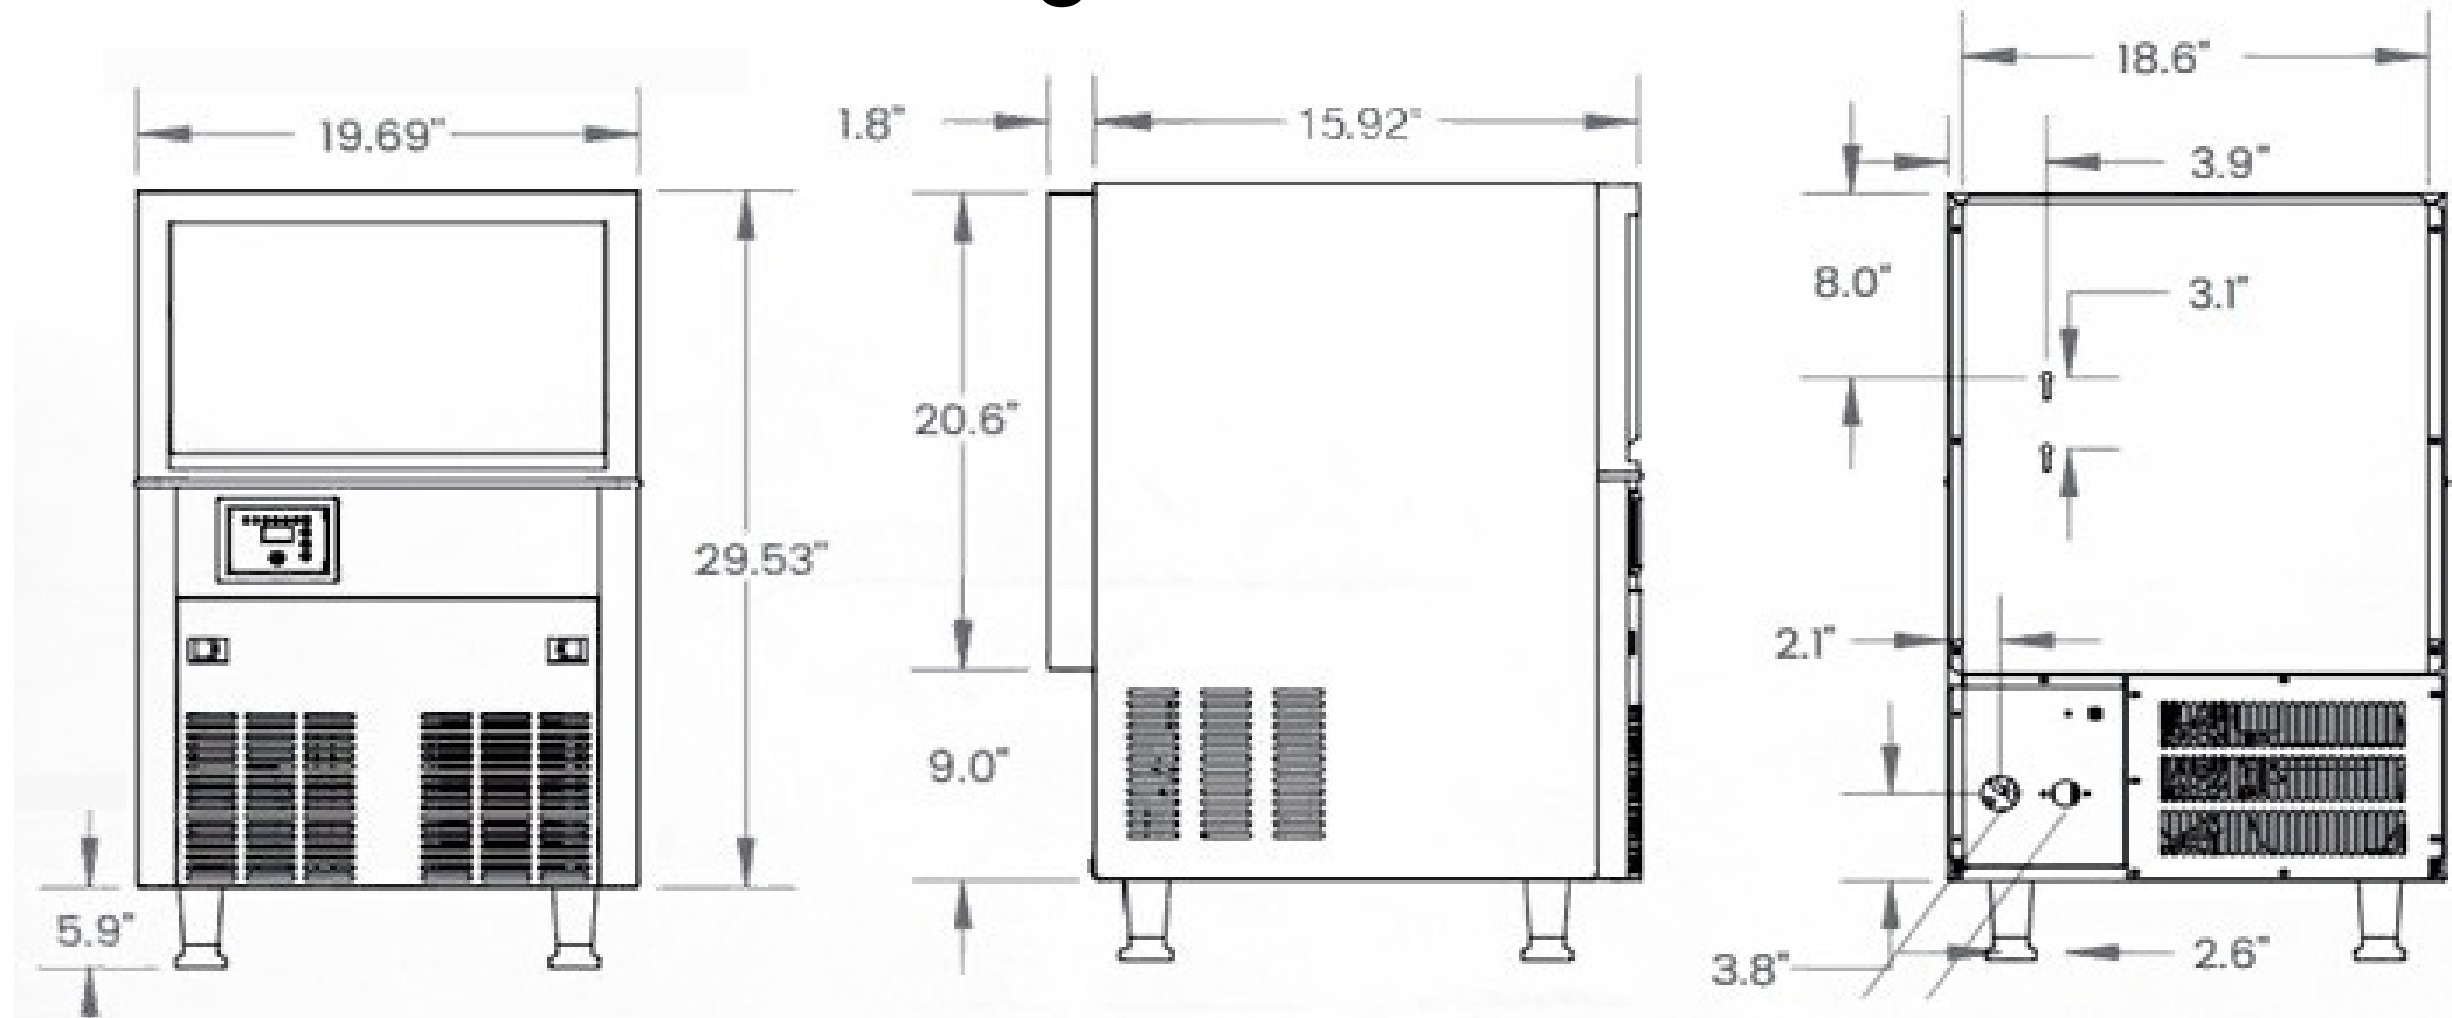

Model #	Voltage	Dimensions (in) (W x D x H)	Net Weight	Shipping Dimensions (in) (W x D x H)	Gross Weight
SK-129S	115/60/1ph	19.7" x 23.1" x 35.4"	110 lbs	42" x 42" x 40.5"	150 lbs
SK-89S	115/60/1ph	19.7" x 17.7" x 35.4"	88 lbs	42" x 42" x 40.5"	128 lbs

Maintenance and cleaning are not covered under warranty

All Ice machines should have a water filter system & cartridge installed.

Recommended cartridge replacement is recommended every 6 months. (may vary based on water quality)