



**VERSA  
HEAT**

**HRG48 SERIES  
48" GAS RANGES**



**HRG48-24GM-4B-N**

**HRG48-24CH-4B  
HRG48-24GM-4B  
HRG48-24GT-4B | HRG48-8B  
48" RANGE W/ 4 OR 8 BURNERS,  
24" CHARBOILER OR  
24" MANUAL OR THERMO GRIDDLE  
AVAILABLE IN NATURAL GAS OR PROPANE**

- Sturdy construction for demanding commercial cooking applications
- User-friendly operation with simple controls
- Multiple function combinations: Griddle (Manual/Thermostat control), Charbroiler, & Hot plate on top with a Static oven(s), on the bottom
- 30,000 BTU per Top burner
- 35,000 BTU per Charbroiler at 12"
- 30,000 BTU per Manual or Thermostat Griddle at 12"
- 33,000 BTU per Static oven
- Oven thermostat adjusts from 200°F to 500°F (93°C to 232°C)
- Stainless steel front and back riser and lift-off high shelf
- Oven interior side guides & bottom porcelain-coated
- Shipped standard, Natural gas or LP conversion kit included.
- Optional casters available
- Gas pressure regulator is supplied with the unit

**WARRANTY:  
LIMITED ONE YEAR PARTS  
AND LABOUR  
SPECIFICATIONS SUBJECT TO  
CHANGE WITHOUT  
NOTICE.**

FIND  
ADDITIONAL  
BENEFITS  
HERE



**ADDITIONAL IMAGES**



**CAST IRON**



**COOL TOUCH  
EDGE & HANDLE**



**MANUAL OR  
THERMOSTAT**



**POLISHED  
PLATE**



**HEAVY DUTY  
GRATE**

**MODEL DESIGNATIONS**



**ADDITIONAL RESOURCES**



TECHNICAL

Code	Gas Type	# of Ovens	# of Oven Racks	Oven BTU	TEMP RANGE °C	TEMP RANGE °F	TOTAL UNIT BTU	Operating Gas Pressure
HRG48-24CH-4B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	246000	5.0" W.C
HRG48-24CH-4B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	234000	10.0" W.C
HRG48-24GM-4B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	246000	5.0" W.C
HRG48-24GM-4B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	218000	10.0" W.C
HRG48-24GT-4B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	246000	5.0" W.C
HRG48-24GT-4B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	218000	10.0" W.C
HRG48-8B-N	NG	2	1	30000	93°C to 260°C	200°F to 500°F	306000	5.0" W.C
HRG48-8B-P	LP	2	1	28000	93°C to 260°C	200°F to 500°F	272000	10.0" W.C

Code	# of Burners	Burner BTU per 12"	Total Burner BTU	Charboiler Width	Charboiler BTU per 12"	Total Charboiler BTU	Griddle Width	Griddle BTU per 12"	Total Griddle BTU
HRG48-24CH-4B-N	4	30000	120000	24"	35000	70000	-	-	-
HRG48-24CH-4B-P	4	30000	120000	24"	35000	70000	-	-	-
HRG48-24GM-4B-N	4	30000	120000	-	-	-	24"	30000	60000
HRG48-24GM-4B-P	4	30000	120000	-	-	-	24"	30000	60000
HRG48-24GT-4B-N	4	30000	120000	-	-	-	24"	30000	60000
HRG48-24GT-4B-P	4	30000	120000	-	-	-	24"	30000	60000
HRG48-8B-N	8	30000	240000	-	-	-	-	-	-
HRG48-8B-P	8	30000	240000	-	-	-	-	-	-




### DIMENSIONS

Code	Dimensions	Width		Depth		Height		Weight	
		Inches	mm	Inches	mm	Inches	mm	Lbs	KG
HRG48-24CH-4B-N	Exterior	48.0	1,220.0	31.4	800.0	60.0	1,530.0	536.8	244.0
HRG48-24CH-4B-P	Shipping	51.2	1,220.0	36.6	930.0	46.5	1,190.0	660.0	300.0
	Each Oven Cavity	20.0	508.0	22.5	572.0	13.3	338.0		
HRG48-24GM-4B-N	Exterior	48.0	1,220.0	31.4	800.0	60.0	1,530.0	578.6	263.0
HRG48-24GM-4B-P	Shipping	51.2	1,300.0	36.6	930.0	46.5	1,190.0	701.8	319.0
	Each Oven Cavity	20.0	508.0	22.5	572.0	13.3	338.0		
HRG48-24GT-4B-N	Exterior	48.0	1,220.0	31.4	800.0	60.0	1,530.0	578.6	263.0
HRG48-24GT-4B-P	Shipping	51.2	1,300.0	36.6	930.0	46.5	1,190.0	701.8	319.0
	Each Oven Cavity	20.0	508.0	22.5	572.0	13.3	338.0		
HRG48-8B-N	Exterior	48.0	1,220.0	31.4	800.0	60.0	1,530.0	523.6	238.0
HRG48-8B-P	Shipping	51.2	1,300.0	36.6	930.0	43.7	1,110.0	642.4	292.0
	Each Oven Cavity	20.0	508.0	22.5	572.0	13.3	338.0		

### PRODUCT DRAWINGS



### LINE DRAWINGS

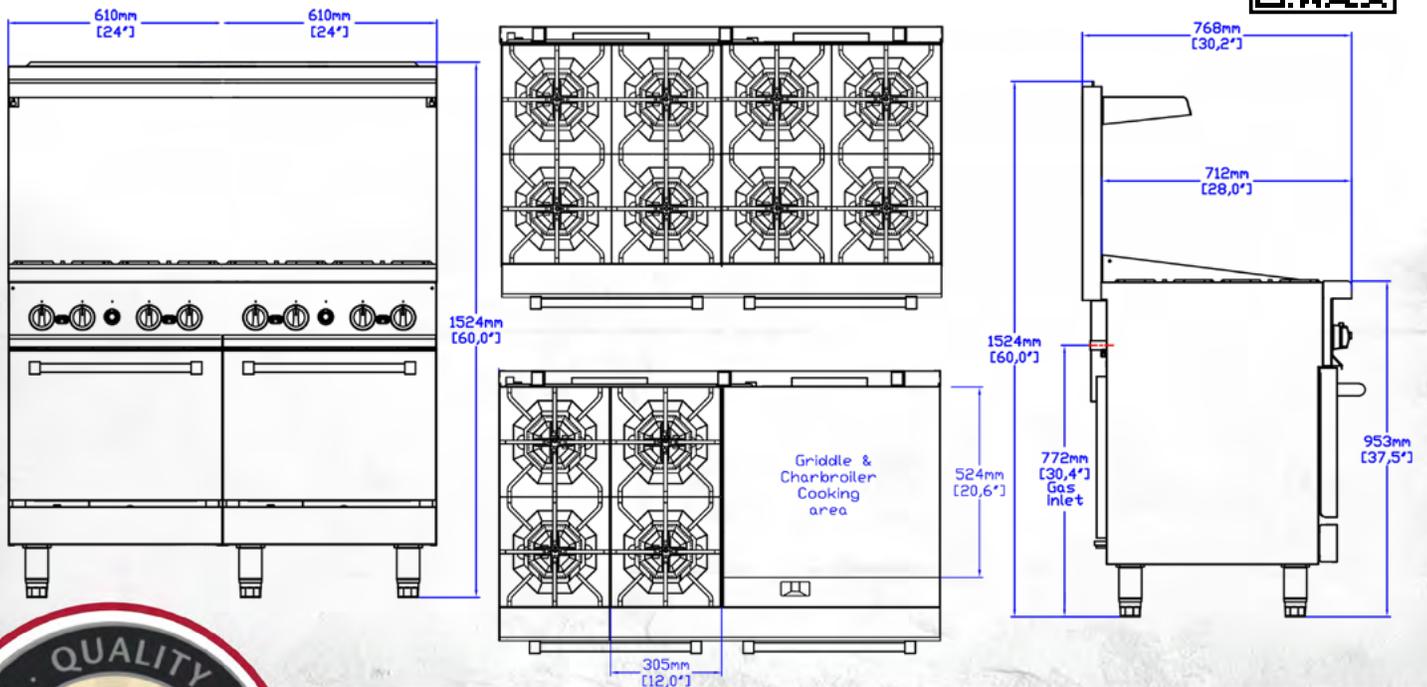

EFI Sales Ltd.  
Toronto Office & DC  
515 Hanlon Creek Blvd.  
Guelph, ON, N1C 0A1

EFI Sales Ltd.  
Vancouver Office & DC  
26895 Gloucester Way  
Langley, BC, V4W 3Y3

(888) 565-9920 Toll Free  
(519) 822-1895 Toronto  
(604) 607-8850 Vancouver

