

Rosko

RO-RCG

Gas Countertop Range

 RO-RCG-12

 RO-RCG-24

 RO-RCG-36

 RO-RCG-12-S


RO-RCG-36



Construction

- Made of grade 430 stainless steel
- Cast iron open burners
- Full width removable crumb tray
- Rear splash guard
- 1" (25 mm) adjustable stainless steel feet
- Optional 4" (102 mm) stainless steel adjustable legs

Operation

- All models offer a propane or natural gas power supply :
 - Factory assembled for a natural gas installation, including a pressure regulator
 - Propane conversion kit included
 - Power conversion must be completed by a certified technician
- Thermostatic safety valve available on some models
- Power outputs from 32 000 à 96 000 BTU/H available depending on the model
- Adjustable temperature by independent infinity controls
- 3/4" (19 mm) NPT gas connector

Legal

- All models require a 6" (152 mm) clearance on both sides as well as behind the unit if next to combustible material
- All models require commercial installation and are not intended for residential use
- One (1) year limited warranty on parts and labor
- Certified to CSA 1.8-2016 Ed.4/ANSI Z83.11-2016 Ed.4 standards

Option



- RO-ACC-4LEG** – Set of 4" (102 mm) Adjustable Legs



955, rue Lachance
Québec, QC G1P 2H3
Canada

1 800 461-3377
roskoequipment.ca

*Due to the continuous development of the product,
specifications are subject to change without notice*

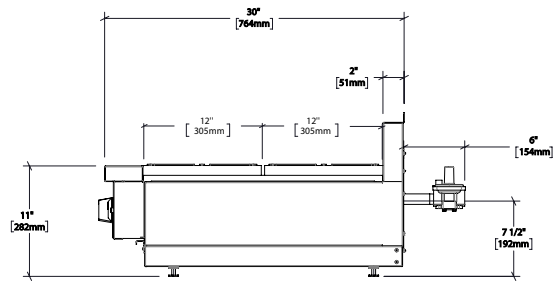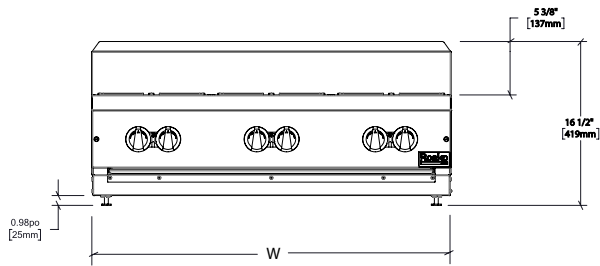

Models	Width (W)	Depth	Total height	Cooking surface	Weight	Shipping dimensions (W x D x H)
RO-RCG-12	12" - 305 mm	30" - 762 mm	16" - 406 mm	12 x 23 3/4"	70 lb - 31 kg	18 x 36 x 21"
RO-RCG-12-S				305 x 603 mm		
RO-RCG-24	24" - 610 mm			24 x 23 3/4"	120 lb - 54 kg	38 x 38 x 24"
RO-RCG-36	36" - 914 mm			36 x 23 3/4"		
				610 x 603 mm	195 lb - 88 kg	

Models	Total output	Number of controls/burners	Natural gas operating pressure	Propane gas operating pressure	Thermostatic safety valve [Option S]
RO-RCG-12	32 000 BTU/H	2	7 po W.C.	11 po W.C.	
RO-RCG-12-S					■
RO-RCG-24	64 000 BTU/H	4			
RO-RCG-36	96 000 BTU/H	6			